

Significant Copper-Gold Growth Potential Confirmed at Nanadie Project, WA

Highlights

- Final Assays from **Phase 1** Reverse Circulation (RC) drilling at the Company's 100%-owned **Nanadie Copper-Gold Project** in WA's Goldfields confirm the program as a **resounding success**, delivering strong growth outcomes in terms of both **tonnage and grade**.
- Step-out holes **NANRC020** to **NANRC023** demonstrate that the deposit remains **wide open to the north**, delivering **broad >0.40% Cu intercepts beyond the limits of the current 40.4Mt Mineral Resource Estimate (MRE)¹ block model**. Key results include:
 - ❖ **Northernmost hole NANRC023:**
 - **44m @ 0.52% Cu, 0.23 g/t Au** from 146m, including:
 - **14m @ 1.02% Cu, 0.58g/t Au** from 163m, within a **thick mineralised zone** of:
 - **187m @ 0.31% Cu, 0.11 g/t Au from 5m.**
 - ❖ **NANRC021:**
 - **33m @ 0.52% Cu, 0.12 g/t Au** from 10m; and
 - **29m @ 0.93% Cu, 0.30 g/t Au** from 50m.
 - ❖ **NANRC022:**
 - **25m @ 0.40% Cu, 0.07 g/t Au** from 102m.
 - ❖ **NANRC020:**
 - **46m @ 0.47% Cu, 0.11 g/t Au** from 177m.
- The intercepts in NANRC021, NANRC022, and NANRC023 are **coincident** with a 2025 **IP chargeability response²** that is **open at depth and to the north**, indicating **further significant exploration upside through step-out drilling**.
- Infill hole **NANRC026** at the southern end of the deposit confirmed **widespread MRE grade copper-gold mineralisation**, returning:
 - **33m @ 0.41% Cu, 0.11 g/t Au** from 87m
 - **27m @ 0.42% Cu, 0.15 g/t Au** from 179m; and
 - **52m @ 0.40% Cu, 0.14 g/t Au** from 226m.
- NANRC026 terminated at 285m due to drilling conditions but is available for extension to a planned depth of 340m via a future diamond 'tail'. Extension would allow testing of potential high-grade plunge targets in this location, as indicated by **62m @ 1.55% Cu, 0.66g/t Au to EOH** in NANRC004 (including **22m @ 2.78% Cu, 1.25g/t Au³**) located on the section to the north.
- The success of Phase 1 **supports immediate follow-up RC and diamond drilling**, with a **Phase 2 RC** program in preparation that will focus on testing the **high-grade open intercepts** in NANRC001, NANRC004 and NANRC018, along with **multiple step-out and down-dip extensional targets** and additional **IP features** beyond the current drilling footprint.



Solstice Minerals' Chief Executive Officer and Managing Director, Mr Nick Castleden, said:

"Our first-ever drilling campaign at Nanadie has exceeded expectations and provided the exploration team with a compelling opportunity to significantly grow this exciting asset. This 6,000m Phase 1 program was designed to improve geological understanding and find the 'edges' of the large mineralised system – so we were expecting a few quiet holes here and there. Pleasingly, nearly every hole returned significant intercepts at or above MRE grade, with the program opening up a plethora of avenues for MRE growth into wide open strike, lateral and down-dip positions.

"An unexpected bonus has been the emergence of outstanding high-grade high-volume targets below holes NANRC001, 004 and 018, together with strong open-ended grade indications elsewhere. The opportunity to define higher-grade positions for incorporation into future MRE's is tantalising and will be a key early focus of Phase 2 follow-up drilling, including extending selected holes that ended in strong copper-gold mineralisation with diamond 'tails' capable of drilling beyond the operating limit of RC drilling at depth.

"Nanadie is rapidly shaping up as an important Western Australian copper-gold growth story and a project that demands sustained drilling. Preparations are underway to mobilise an RC rig before the end of the month, followed by a diamond rig shortly thereafter."

Nanadie Copper-Gold Drilling Update

Solstice Minerals Limited (**Solstice** or the **Company**) is pleased to report final assay results from its recent **23-hole** (6,030m) **Phase 1** MRE expansion drilling program (**Figure 1**) at the advanced 100%-owned **Nanadie Copper-Gold Project**, located northwest of Sandstone in WA's Goldfields.

This set of drillholes (NANRC020 to NANRC027) focussed on testing the northern extensions of the deposit and successfully demonstrated that the deposit remains **open to the north**, with **wide >0.40% Cu intercepts returned beyond the limits of the MRE**, and **strong high-grade indications** that are coincident with a northward trending **IP chargeability** feature identified in Solstice's 2025 dipole-dipole survey² (**Figure 2**).

Importantly, holes drilled at the northern extent of the deposit have returned strong and consistent copper mineralisation, as demonstrated by **>40 Cu% metres** of contained copper in each (**Figure 1**). Significant intercepts include:

- ❖ NANRC023 (**northernmost hole**): **44m @ 0.52% Cu, 0.23 g/t Au** from 146m, incl. **14m @ 1.02% Cu, 0.58g/t Au** from 163m, within a **broad mineralised zone** of **187m @ 0.31% Cu, 0.11 g/t Au from 5m** (**Figure 3**).
- ❖ NANRC021: **33m @ 0.52% Cu, 0.12 g/t Au** from 10m, and **29m @ 0.93% Cu, 0.30 g/t Au** from 50m (**Figure 3**).
- ❖ NANRC022: **25m @ 0.40% Cu, 0.07 g/t Au** from 102m (**Figure 4**).
- ❖ NANRC020: **46m @ 0.47% Cu, 0.11 g/t Au** from 177m.

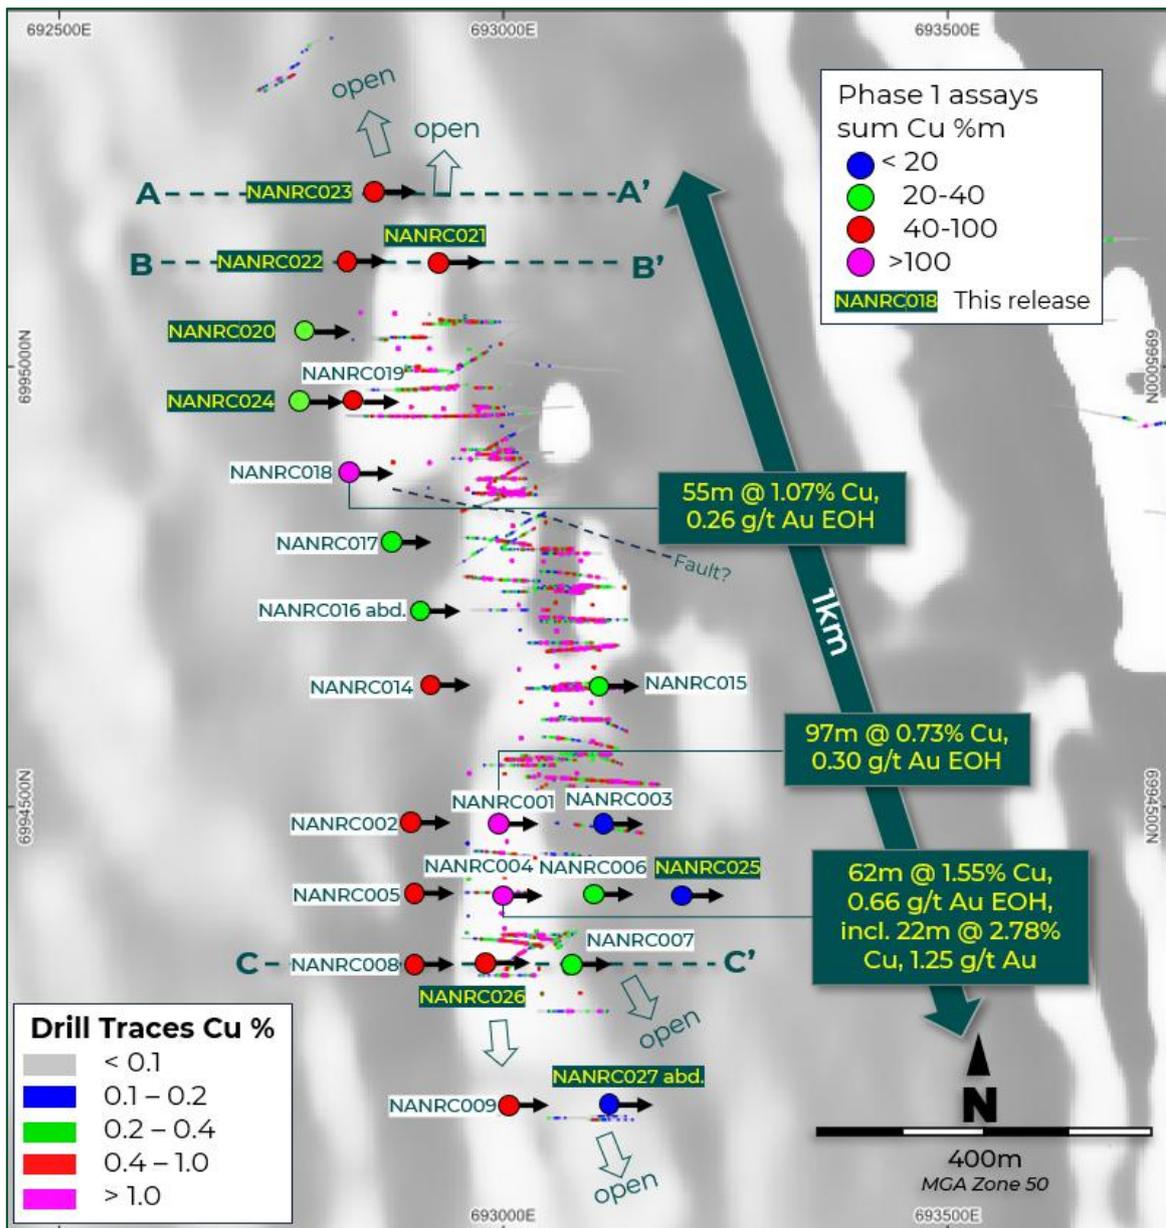


Figure 1. Nanadie Deposit aeromagnetic imagery showing Phase 1 RC drill collars (coloured for sum of Cu% metres downhole) and high-grade intercepts³, and downhole copper values in all previous drilling¹, projected to surface. Cross-section A-A' labelled. Collars this release in yellow font.

At the southern end of the deposit, infill hole **NANRC026** confirmed the presence of **widespread MRE grade copper-gold mineralisation** (Figure 5), returning:

- ❖ **33m @ 0.41% Cu, 0.11 g/t Au** from 87m.
- ❖ **27m @ 0.42% Cu, 0.15 g/t Au** from 179m.
- ❖ **52m @ 0.40% Cu, 0.14 g/t Au** from 226m.

NANRC026 terminated short of target depth at 285m due to drilling conditions but is available for extension to a planned depth of 340m via a future diamond 'tail'. Extension would allow testing of possible high-grade plunge targets in this location, as indicated by **62m @ 1.55% Cu, 0.66g/t Au to EOH**



in NANRC004 (including **22m @ 2.78% Cu, 1.25g/t Au**) located on the next section to the north (**Figure 1**).

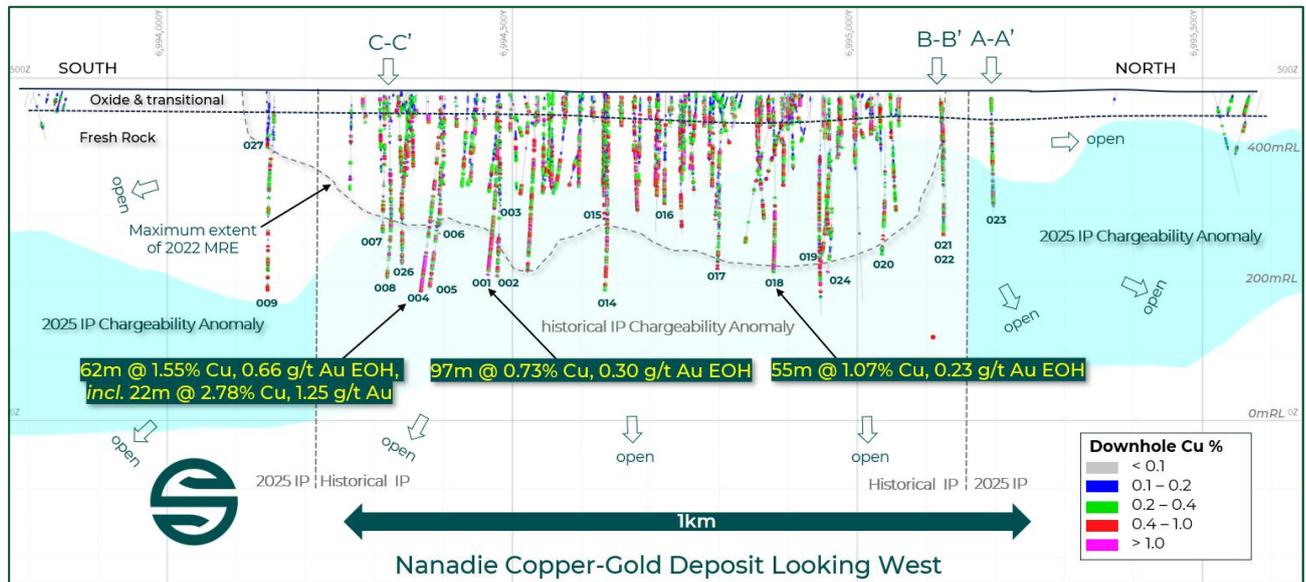


Figure 2. Nanadie long section looking west, showing all Phase 1 drillholes labelled, high grade intercepts³, southern IP chargeability anomaly², and location of cross-sections A-A', B-B' and C-C' in this release relative to the maximum extent of the 2022 MRE block model and historical drilling¹.

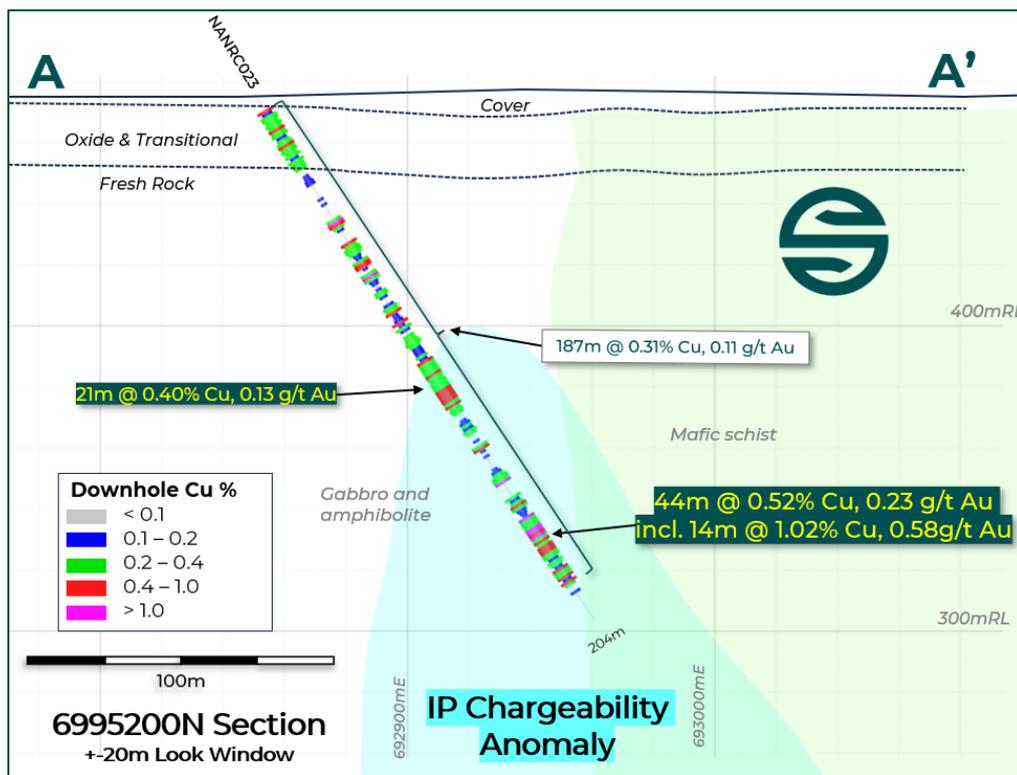


Figure 3. Nanadie Project cross-section 6995200N showing Phase 1 step-out drillhole NANRC023 simplified geology, and outline of a 2025 IP chargeability anomaly.

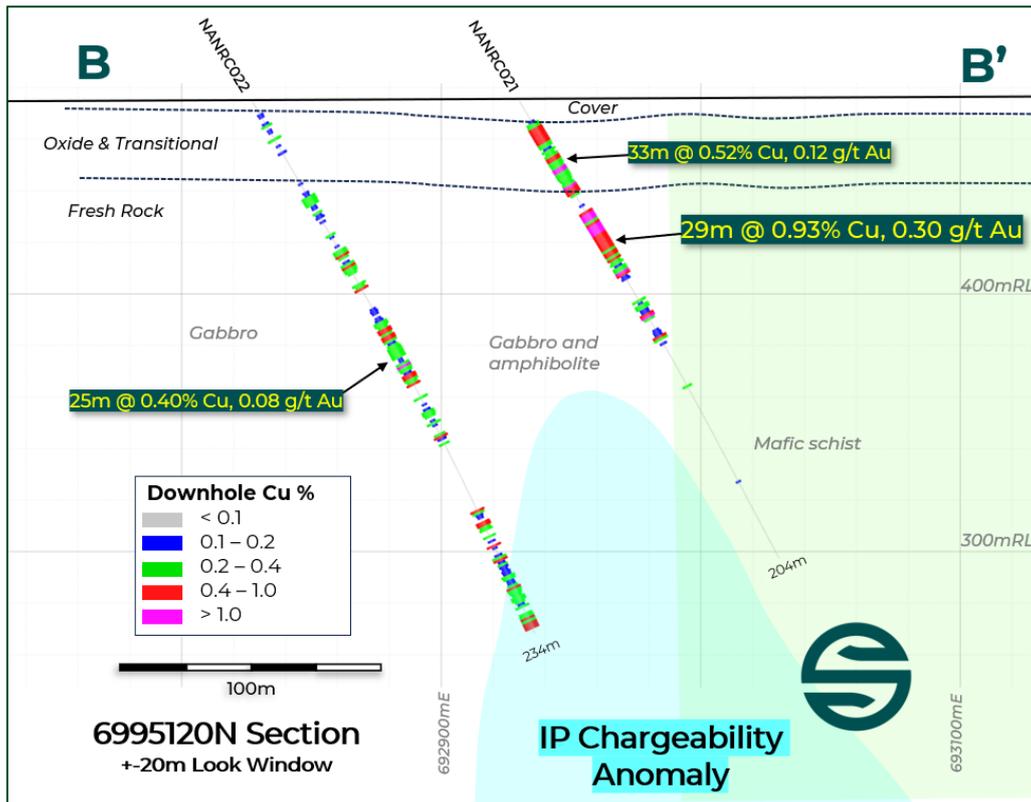


Figure 4. Nanadie Project cross-section 6995120N showing Phase 1 step-out drillholes NANRC021 and NANRC022, simplified geology, and outline of a 2025 IP chargeability anomaly.

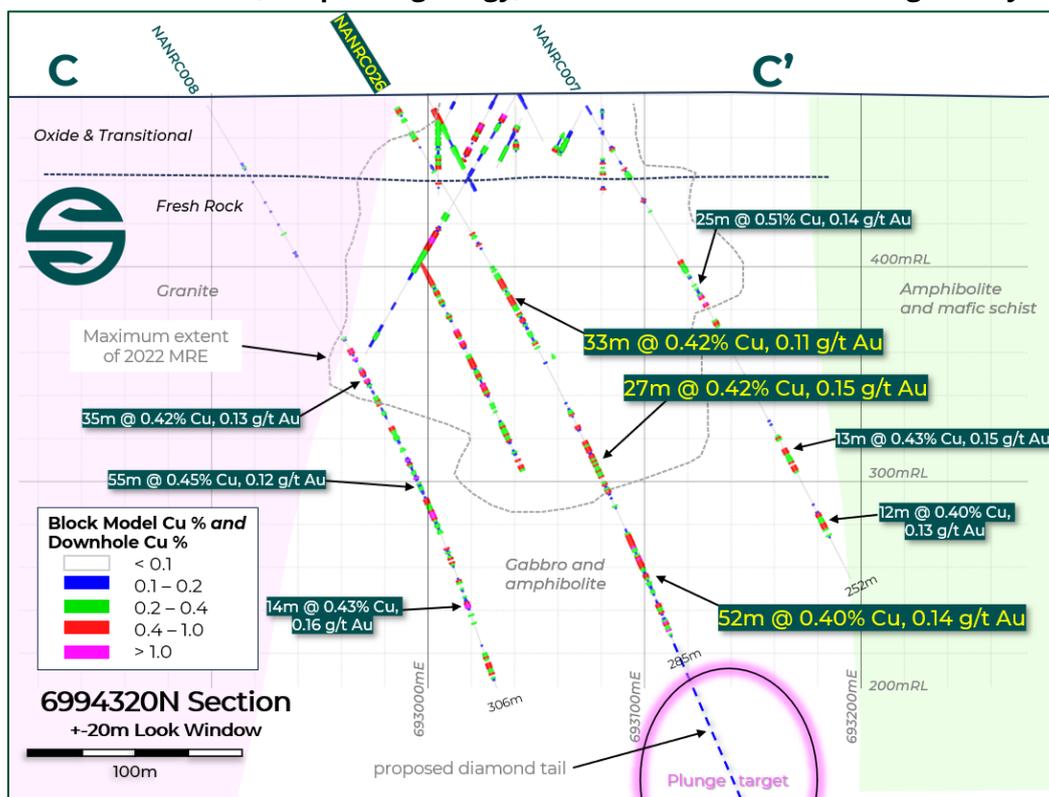


Figure 5. Nanadie Project cross-section 6994320N showing Phase 1 infill drillholes NANRC026, NANRC008 and NANRC007³ relative to historical drilling¹, the boundary of the 2022 MRE block model, simplified geology and an interpreted high-grade plunge target.



In summary, the Company's Phase 1 drilling campaign has delivered multiple successes that support immediate follow-up RC and diamond drilling. An approximate 8,000m Phase 2 RC program is being designed that will focus on testing the high-grade open intercepts in NANRC001, NANRC004 and NANRC018, as well as expanding on the wealth of step-out and down-dip extensional targets and testing IP features beyond the current drilling (**Figure 2**).

The Solstice team is preparing to mobilise the RC rig before the end of the month, with a diamond rig to follow shortly thereafter.

All drilling details are provided in **Table 1** and **Appendix 1**, and all >0.1% Cu mineralised intervals listed in **Table 2**.

About the Nanadie Copper Gold Deposit

Nanadie is situated within a granted Mining Lease approximately 100km northwest of Sandstone (**Figure 6**) and is supported by an existing Inferred MRE of **40.4 million tonnes at 0.4% copper and 0.1g/t gold**, containing **162,000 tonnes of copper** and **130,000 ounces of gold**¹. The deposit represents a substantial base of strategic metals with strong future demand outlooks.

Historical drilling below a shallow soil and sand cover and weathering profile has defined a wide, near-surface accumulation of disseminated and remobilised sulphide veinlet style chalcopyrite (+/- pyrrhotite and pyrite) mineralisation over 150m wide and 900m long. Approximately 90% of the MRE is fresh rock mineralisation below 40m depth. Significant zones of >1% Cu occur where chalcopyrite vein density increases, and increased sulphide veining is typically accompanied by raised gold values. No deleterious sulphide species are present.

Table 1: Nanadie Well 2012 JORC Mineral Resource Estimate¹.

Resource Category	Material Type	Volume	Tonnes	Cu Grade (%)	Cu Metal (t)	Au Grade (g/t)	Au Metal (oz)	Ag Grade (g/t)	Ag Metal (oz)
Inferred	Oxide	1,300,000	3,500,000	0.44	16,000	0.12	13,000	0.70	74,000
	Transitional	200,000	600,000	0.45	3,000	0.12	2,000	1.50	31,000
	Fresh	11,700,000	36,300,000	0.39	143,000	0.10	115,000	1.10	1,259,000
Total		13,200,000	40,400,000	0.4	162,000	0.10	130,000	1.00	1,364,000

Note: Differences in sum totals of tonnages and grades may occur due to rounding cut-off at 0.25% Cu, reported grades and tonnages for all metals are estimated top-cut grades and tonnages.

Previous drilling at the deposit rarely extended beyond the host mafic intrusive package, with much of the drilling starting and ending within mineralised host rocks. Geological logging of Solstice's Phase 1 drilling has built a geological picture consistent with that outlined by historical drilling, comprising a widely mineralised steeply dipping host mafic intrusive (gabbro and dolerite) package flanked by amphibolite (that is also mineralised in places) and chloritic schists to the east, and younger granitoid rocks to the west.



The geology observed is strongly supportive of continued exploration and MRE expansion drilling of the broader Nanadie system which remains open to strike, laterally, and down dip, as well as testing compelling step-out geological and IP targets.

Photo 1. Typical RC drill samples (NANRC001)³ at Nanadie. Note limited oxidation profile below shallow sandy soils.



References

1. Refer to ASX: SLS 5 February 2025 'Solstice Secures Strategic Copper Exposure'.
2. Refer to ASX: SLS 8 August 2025 'IP Survey Points to Step-Out Drill Targets at Nanadie Copper Gold Project'.
3. Refer to ASX: SLS 3 February 2026 'Outstanding High-grade Copper-Gold Intercepts in First RC Holes at Nanadie Project', 23 February 2026 'Strong Copper-Gold Intercepts Continue at Nanadie Project', and 3 March 2026 'New High-Grade Zone Emerges at Nanadie Copper-Gold Project, WA'.

All exploration releases are available on the Company's website at:

<https://solsticeminerals.com.au/investor-centre/asx-announcements>.

This announcement has been authorised for release by the Board.

For further information please contact:
Nick Castleden - CEO & Managing Director
T: +61 (8) 9200 1838

Media inquiries:
Nicholas Read – Read Corporate
T: +61 (8) 9388 1474

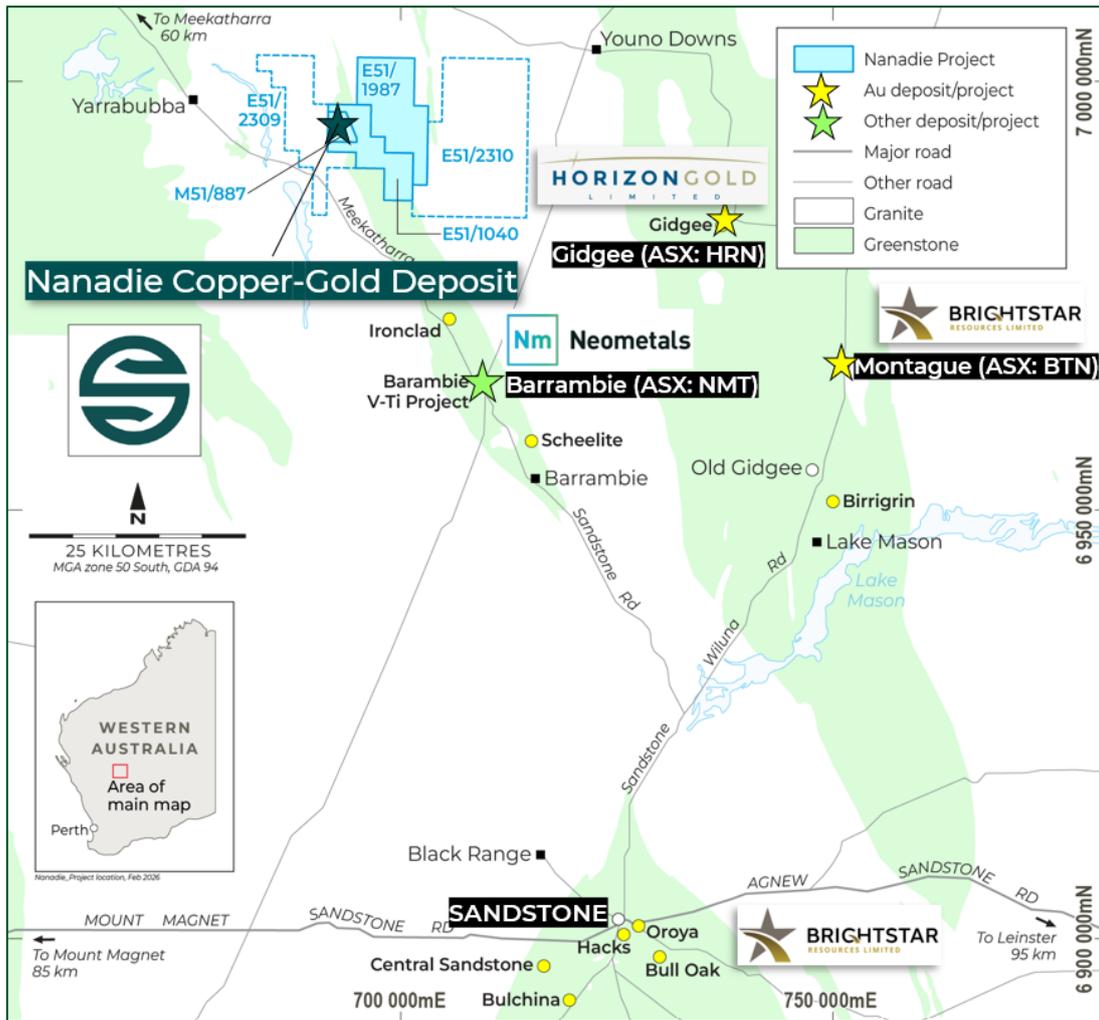


Figure 6: Location of the Nanadie Copper-Gold Project tenements NW of Sandstone WA.

Table 1. All Phase 1 RC Drillhole details and significant intercepts.

Hole ID	Prospect	Type	Easting	Northing	RL	Dip	Azim	Depth	Significant Intercepts	From
NANRC001	Nanadie	RC	692997	6994478	475	-60	90	300	36m @ 0.52% Cu, 0.17 g/t Au	75
								and	15m @ 0.46% Cu, 0.13 g/t Au	121
								and	14m @ 0.42% Cu, 0.12 g/t Au	178
								and	97m @ 0.73% Cu, 0.30 g/t Au EOH	203
NANRC002	Nanadie	RC	692895	6994480	475	-60	90	306	17m @ 0.60% Cu, 0.19 g/t Au	105
								and	14m @ 0.58% Cu, 0.20 g/t Au	252
								and	22m @ 0.42% Cu, 0.12 g/t Au	272
NANRC003	Nanadie	RC	693116	6994483	475	-60	90	192	>0.1% Cu anomalism	
NANRC004	Nanadie	RC	692999	6994397	475	-60	90	318	10m @ 0.63% Cu, 0.25 g/t Au	80
								and	11m @ 0.48% Cu, 0.16 g/t Au	104
								and	16m @ 0.76% Cu, 0.26 g/t Au	140
								and	43m @ 0.44% Cu, 0.16 g/t Au	166
								and	62m @ 1.55% Cu, 0.66 g/t Au EOH	256
								incl.	22m @ 2.78% Cu and 1.25g/t Au	261
NANRC005	Nanadie	RC	692900	6994400	475	-60	90	324	27m @ 0.48% Cu, 0.16 g/t Au	119
								and	11m @ 1.23% Cu, 0.26 g/t Au	235
								and	36m @ 0.58% Cu, 0.17 g/t Au	262



									<i>and</i>	15m @ 0.86% Cu, 0.17 g/t Au	304
NANRC006	Nanadie	RC	693099	6994398	475	-60	90	258		11m @ 0.78% Cu, 0.23 g/t Au	188
									<i>and</i>	12m @ 0.42% Cu, 0.12 g/t Au	243
NANRC007	Nanadie	RC	693073	6994314	475	-60	90	252		25m @ 0.51% Cu, 0.14 g/t Au	84
									<i>and</i>	13m @ 0.43% Cu, 0.15 g/t Au	184
									<i>and</i>	12m @ 0.40% Cu, 0.13 g/t Au	218
NANRC008	Nanadie	RC	692898	6994321	475	-60	90	306		35m @ 0.42% Cu, 0.13 g/t Au	131
									<i>and</i>	55m @ 0.45% Cu, 0.12 g/t Au	172
									<i>and</i>	14m @ 0.43% Cu, 0.16 g/t Au	250
NANRC009	Nanadie	RC	693003	6994155	475	-60	90	343		11m @ 0.41% Cu, 0.09 g/t Au	156
									<i>and</i>	23m @ 0.40% Cu, 0.13 g/t Au	285
									<i>and</i>	10m @ 0.54% Cu, 0.23 g/t Au EOH	333
NANRC010	Recce	RC	692402	6997144	475	-60	240	120		NSR	
NANRC011	Recce	RC	692469	6997183	475	-60	240	120		11m @ 0.12% Cu	94
NANRC012	Recce	RC	692541	6997218	475	-60	240	126		16m @ 0.14% Cu	41
NANRC013	Recce	RC	692609	6997255	475	-60	240	126		NSR	
NANRC014	Nanadie	RC	692919	6994637	475	-60	90	324		14m @ 0.42% Cu, 0.14 g/t Au	174
									<i>and</i>	40m @ 0.43% Cu, 0.13 g/t Au	222
									<i>and</i>	34m @ 0.63% Cu, 0.17 g/t Au	269
									<i>and</i>	12m @ 0.42% Cu, 0.09g/t Au EOH	312
NANRC015	Nanadie	RC	693109	6994635	475	-60	90	222		<i>broad >0.2% Cu anomalism</i>	
NANRC016	Nanadie	RC	692906	6994722	475	-60	90	186		18m @ 0.46% Cu, 0.13 g/t Au	123
									<i>and</i>	18m @ 0.41% Cu, 0.11 g/t Au	156
NANRC017	Nanadie	RC	692873	6994800	475	-60	90	288		<i>broad >0.2% Cu anomalism</i>	
NANRC018	Nanadie	RC	692827	6994878	475	-60	90	306		27m @ 0.62% Cu, 0.06 g/t Au	26
										21m @ 0.49% Cu, 0.06 g/t Au	83
										106m @ 0.86% Cu, 0.23 g/t Au EOH	201
									<i>including</i>	15m @ 1.51% Cu, 0.35g/t Au	201
									<i>and</i>	55m @ 1.07% Cu, 0.26g/t Au EOH	252
									<i>including</i>	24m @ 1.42% Cu, 0.34g/t Au, 11.4g/t Ag	260
									<i>and</i>	11m @ 1.53% Cu, 0.35g/t Au, 5.6g/t Ag	293
NANRC019	Nanadie	RC	692828	6994959	475	-60	90	281		17m @ 0.42% Cu, 0.11 g/t Au	41
										11m @ 0.93% Cu, 0.18 g/t Au	65
										14m @ 0.40% Cu, 0.08 g/t Au	192
										26m @ 0.42% Cu, 0.15 g/t Au	209
										23m @ 0.41% Cu, 0.10 g/t Au	247
NANRC020	Nanadie	RC	692834	6994963	475	-60	90	270		46m @ 0.47% Cu, 0.11 g/t Au	177
NANRC021	Nanadie	RC	692930	6995121	475	-60	90	204		33m @ 0.52% Cu, 0.12 g/t Au	10
									<i>and</i>	29m @ 0.93% Cu, 0.30 g/t Au	50
NANRC022	Nanadie	RC	692827	6995120	475	-60	90	234		25m @ 0.40% Cu, 0.07 g/t Au	102
NANRC023	Nanadie	RC	692851	6995194	475	-60	90	204		21m @ 0.40% Cu, 0.13 g/t Au	102
									<i>and</i>	44m @ 0.52% Cu, 0.23 g/t Au	146
									<i>including</i>	14m @ 1.02% Cu, 0.58g/t Au	163
NANRC024	Nanadie	RC	692755	6994959	475	-60	90	306		<i>>0.1% Cu anomalism</i>	
NANRC025	Nanadie	RC	693200	6994403	475	-60	90	222		NSR	
NANRC026	Nanadie	RC	692985	6994335	475	-60	90	285		33m @ 0.41% Cu, 0.11 g/t Au	87
									<i>and</i>	27m @ 0.42% Cu, 0.15 g/t Au	179
									<i>and</i>	52m @ 0.40% Cu, 0.14 g/t Au	226
NANRC027	Nanadie	RC	693127	6994155	475	-60	90	99 <i>abd.</i>		<i>Abandoned</i>	

Significant intercepts in Table 1 are reported at a greater than 10m interval at >0.4% Cu, on the basis of a 0.2% Cu and 0.1g/t Au lower cut-off and allowing for a maximum 5m internal dilution. Note: NANRC010 to NANRC013 were drilled on a reconnaissance traverse 2km to the north of Nanadie.



Forward-Looking Statements

This announcement may contain certain forward-looking statements, guidance, forecasts, estimates, prospects, projections or statements in relation to future matters that may involve risks or uncertainties and may involve significant items of subjective judgement and assumptions of future events that may or may not eventuate (**Forward-Looking Statements**). Forward-Looking Statements can generally be identified by the use of forward-looking words such as "anticipate", "estimates", "will", "should", "could", "may", "expects", "plans", "forecast", "target" or similar expressions and may include, without limitation, statements regarding plans, strategies and objectives of management, anticipated production and expected costs. Indications of, and guidance on future earnings, cash flows, costs, financial position and performance are also Forward-Looking Statements.

Persons reading this announcement are cautioned that such statements are only predictions, and that actual future results or performance may be materially different. Forward-Looking Statements, opinions and estimates included in this announcement are based on assumptions and contingencies which are subject to change, without notice, as are statements about market and industry trends, which are based on interpretation of current market conditions. Forward-Looking Statements are provided as a general guide only and should not be relied on as a guarantee of future performance.

No representation or warranty, express or implied, is made by Solstice that any Forward-Looking Statement will be achieved or proved to be correct. Further, Solstice disclaims any intent or obligation to update or revise any Forward-Looking Statement whether as a result of new information, estimates or options, future events or results or otherwise, unless required to do so by law.

Compliance Statement - New Results

The information in this release that relates to new Exploration Results is based on and fairly represents information and supporting documentation prepared by Mr Nick Castleden, a competent person who is a Member of the Australian Institute of Geoscientists. Mr Castleden is an employee of Solstice Minerals Limited. Mr Castleden has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Castleden consents to the inclusion in this release of the new Exploration Results in the form and context in which they appear.

Compliance Statement - Previously Reported Results

The information in this announcement that relates to previously reported Exploration Results and Estimates of Mineral Resources is extracted from the ASX announcements as noted in the 'References' and referenced in the text (**Original Announcements**). The Company confirms that it is not aware of any new information or data that materially affects the relevant information included in the Original Announcements and, in the case of Estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the Original Announcements continue to apply and have not materially changed. Solstice confirms that the form and context in which the Competent Persons' findings are presented have not been materially modified from the Original Announcement.



Table 2. All samples >0.10% copper in NANRC020 to NANRC027

Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC020	12	13	0.14	0.02	0.67
NANRC020	13	14	0.22	0.02	0.36
NANRC020	14	15	0.17	0.02	0.60
NANRC020	15	16	0.18	0.10	0.43
NANRC020	16	17	0.20	0.07	0.33
NANRC020	36	37	0.16	0.10	0.37
NANRC020	122	123	0.12	X	0.55
NANRC020	128	129	0.11	0.13	0.46
NANRC020	130	131	0.63	0.12	2.23
NANRC020	131	132	0.14	0.03	0.58
NANRC020	132	133	0.11	0.02	0.40
NANRC020	133	134	0.21	0.04	0.65
NANRC020	134	135	0.22	0.03	0.73
NANRC020	135	136	0.27	0.04	1.11
NANRC020	142	143	0.11	0.02	0.35
NANRC020	148	149	0.16	0.04	0.34
NANRC020	150	151	0.21	0.01	0.37
NANRC020	155	156	0.20	X	0.34
NANRC020	156	157	0.22	0.06	0.46
NANRC020	169	170	0.11	0.03	0.32
NANRC020	176	177	0.10	0.04	0.47
NANRC020	177	178	0.21	0.07	0.57
NANRC020	178	179	0.21	0.06	0.62
NANRC020	179	180	0.44	0.10	1.48
NANRC020	180	181	2.10	0.08	6.17
NANRC020	181	182	0.26	0.03	0.68
NANRC020	182	183	0.16	0.03	0.43
NANRC020	183	184	0.74	0.09	2.10
NANRC020	184	185	0.45	0.07	1.22
NANRC020	185	186	0.53	0.06	1.85
NANRC020	186	187	0.29	0.05	0.82
NANRC020	187	188	0.33	0.05	0.88
NANRC020	188	189	0.18	0.06	0.42
NANRC020	190	191	1.51	0.31	4.32
NANRC020	191	192	1.19	0.35	3.47
NANRC020	193	194	0.13	0.03	0.38
NANRC020	195	196	0.23	0.08	0.61
NANRC020	196	197	0.15	0.05	0.33
NANRC020	197	198	0.92	0.17	2.75
NANRC020	198	199	0.61	0.24	1.59
NANRC020	199	200	0.74	0.12	1.96
NANRC020	200	201	0.71	0.14	1.93
NANRC020	201	202	0.85	0.20	2.40
NANRC020	202	203	0.83	0.15	2.34
NANRC020	203	204	0.75	0.20	2.06
NANRC020	204	205	0.29	0.07	0.79
NANRC020	205	206	0.27	0.07	0.64
NANRC020	206	207	0.39	0.15	0.98

Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC020	207	208	0.35	0.15	0.70
NANRC020	208	209	0.35	0.12	0.99
NANRC020	209	210	0.31	0.10	1.19
NANRC020	210	211	0.23	0.08	0.74
NANRC020	211	212	0.52	0.21	2.37
NANRC020	212	213	1.02	0.22	3.38
NANRC020	213	214	0.75	0.17	2.26
NANRC020	214	215	0.34	0.07	0.93
NANRC020	215	216	0.26	0.07	0.71
NANRC020	216	217	0.27	0.10	0.53
NANRC020	217	218	0.29	0.10	0.59
NANRC020	218	219	0.24	0.08	0.51
NANRC020	219	220	0.29	0.08	0.63
NANRC020	220	221	0.33	0.08	0.76
NANRC020	221	222	0.27	0.07	0.59
NANRC020	222	223	0.24	0.08	0.54
NANRC020	234	235	0.11	0.01	0.27
NANRC020	236	237	0.47	X	0.82
NANRC020	242	243	0.46	0.11	0.70
NANRC020	253	254	0.19	0.07	0.48
NANRC020	254	255	0.19	0.07	0.53
NANRC020	255	256	0.41	0.07	1.70
NANRC020	256	257	0.28	0.07	0.99
NANRC020	257	258	0.40	0.06	1.17
NANRC020	258	259	0.31	0.10	0.69
NANRC020	259	260	0.32	0.11	0.78
NANRC020	260	261	0.30	0.07	0.74
NANRC020	261	262	0.18	0.05	0.46
NANRC020	262	263	0.12	0.03	0.40
NANRC020	263	264	0.17	0.05	0.43
NANRC020	264	265	0.26	0.12	0.62
NANRC020	265	266	0.26	0.10	0.58
NANRC020	266	267	0.33	0.11	0.88
NANRC020	267	268	0.31	0.12	0.94
NANRC021	9	10	0.13	0.01	0.52
NANRC021	10	11	0.27	0.79	0.63
NANRC021	11	12	0.28	0.07	0.15
NANRC021	12	13	0.51	0.04	0.81
NANRC021	13	14	0.52	0.03	0.33
NANRC021	14	15	0.45	0.03	0.35
NANRC021	15	16	0.51	0.07	0.37
NANRC021	16	17	0.43	0.03	0.29
NANRC021	17	18	0.54	0.22	0.96
NANRC021	18	19	0.44	0.06	0.44
NANRC021	19	20	0.38	0.16	0.78
NANRC021	20	21	0.29	0.23	0.48
NANRC021	21	22	0.18	0.10	0.40
NANRC021	22	23	0.34	0.08	0.39
NANRC021	23	24	0.20	0.06	0.27



Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC021	24	25	0.32	0.10	0.49
NANRC021	25	26	0.58	0.20	0.53
NANRC021	26	27	0.91	0.17	0.91
NANRC021	27	28	0.35	0.05	0.29
NANRC021	28	29	0.36	0.04	0.35
NANRC021	29	30	0.28	0.03	0.32
NANRC021	30	31	2.02	0.64	0.87
NANRC021	31	32	2.38	0.22	0.88
NANRC021	32	33	0.31	0.04	0.33
NANRC021	33	34	0.36	0.06	0.38
NANRC021	34	35	0.37	0.09	0.43
NANRC021	35	36	0.27	0.04	0.14
NANRC021	36	37	0.23	0.03	0.17
NANRC021	37	38	0.28	0.05	0.24
NANRC021	38	39	1.02	0.12	0.30
NANRC021	39	40	0.64	0.07	0.28
NANRC021	40	41	0.53	0.07	0.22
NANRC021	41	42	0.48	0.10	0.20
NANRC021	42	43	0.21	0.04	0.12
NANRC021	47	48	0.12	0.03	0.23
NANRC021	50	51	0.69	0.24	1.25
NANRC021	51	52	1.44	1.08	3.14
NANRC021	52	53	2.67	0.56	5.31
NANRC021	53	54	1.03	0.41	2.00
NANRC021	54	55	0.37	0.11	0.81
NANRC021	55	56	0.56	0.15	1.10
NANRC021	56	57	4.17	1.25	8.04
NANRC021	57	58	1.57	0.33	3.32
NANRC021	58	59	1.10	0.24	2.27
NANRC021	59	60	2.28	0.31	4.61
NANRC021	60	61	0.75	0.15	1.98
NANRC021	61	62	0.61	0.13	1.40
NANRC021	62	63	0.49	0.21	0.66
NANRC021	63	64	1.00	0.37	1.56
NANRC021	64	65	0.42	0.14	0.70
NANRC021	65	66	0.95	0.53	1.95
NANRC021	66	67	0.91	0.12	1.91
NANRC021	67	68	0.39	0.11	0.89
NANRC021	68	69	0.52	0.08	1.10
NANRC021	69	70	0.96	0.99	1.99
NANRC021	70	71	0.29	0.06	0.63
NANRC021	71	72	0.50	0.12	1.05
NANRC021	72	73	0.23	0.07	0.46
NANRC021	73	74	0.38	0.11	0.80
NANRC021	74	75	0.17	0.05	0.32
NANRC021	75	76	0.30	0.06	0.54
NANRC021	76	77	0.35	0.05	0.76
NANRC021	77	78	1.25	0.54	2.41
NANRC021	78	79	0.77	0.17	1.62
NANRC021	79	80	0.15	0.04	0.30
NANRC021	80	81	0.19	0.05	0.37

Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC021	90	91	0.30	0.08	0.72
NANRC021	91	92	0.11	0.02	0.32
NANRC021	92	93	0.30	0.09	0.81
NANRC021	93	94	0.36	0.08	0.94
NANRC021	94	95	0.19	0.05	0.42
NANRC021	95	96	0.19	0.03	0.27
NANRC021	96	97	0.86	0.15	2.21
NANRC021	97	98	1.01	0.41	3.74
NANRC021	98	99	0.24	0.05	0.66
NANRC021	103	104	0.14	0.04	0.28
NANRC021	104	105	0.18	0.06	0.40
NANRC021	105	106	0.17	0.06	0.40
NANRC021	106	107	0.58	0.21	1.81
NANRC021	107	108	0.36	0.08	1.08
NANRC021	109	110	0.15	0.06	0.43
NANRC021	128	129	0.20	0.07	0.65
NANRC021	170	171	0.11	0.02	0.60
NANRC022	6	7	0.14	0.01	0.09
NANRC022	7	8	0.12	0.03	0.12
NANRC022	10	11	0.15	0.03	0.20
NANRC022	11	12	0.24	0.04	0.24
NANRC022	13	14	0.11	0.01	0.33
NANRC022	14	15	0.11	0.02	0.24
NANRC022	17	18	0.32	0.09	0.25
NANRC022	20	21	0.11	0.02	0.42
NANRC022	23	24	0.20	0.03	0.22
NANRC022	37	38	0.11	0.01	0.23
NANRC022	41	42	0.15	0.02	1.41
NANRC022	42	43	0.12	0.01	0.40
NANRC022	43	44	0.32	0.03	1.26
NANRC022	44	45	0.37	0.05	0.99
NANRC022	45	46	0.33	0.05	0.89
NANRC022	46	47	0.29	0.07	0.76
NANRC022	47	48	0.13	0.04	0.39
NANRC022	48	49	0.14	0.04	0.55
NANRC022	50	51	0.21	0.06	0.51
NANRC022	51	52	0.14	0.04	0.40
NANRC022	52	53	0.20	0.18	0.62
NANRC022	54	55	0.14	0.01	0.49
NANRC022	60	61	0.22	0.02	0.65
NANRC022	61	62	0.11	0.03	0.35
NANRC022	65	66	0.11	0.03	0.33
NANRC022	67	68	0.36	0.03	1.15
NANRC022	68	69	0.32	0.04	1.10
NANRC022	69	70	0.47	0.05	1.63
NANRC022	70	71	0.23	0.03	0.77
NANRC022	72	73	0.16	0.03	0.53
NANRC022	73	74	0.32	0.15	1.01
NANRC022	74	75	0.46	0.09	1.42
NANRC022	75	76	0.40	0.07	1.30
NANRC022	76	77	0.28	0.05	0.87



Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC022	77	78	0.21	0.05	0.65
NANRC022	82	83	0.36	0.06	1.09
NANRC022	83	84	0.21	0.09	0.45
NANRC022	84	85	0.78	0.09	2.49
NANRC022	93	94	0.14	0.01	0.38
NANRC022	94	95	0.17	0.02	0.51
NANRC022	95	96	0.15	0.05	0.47
NANRC022	97	98	0.14	0.02	0.61
NANRC022	98	99	0.19	0.03	0.63
NANRC022	99	100	0.29	0.05	0.97
NANRC022	100	101	0.32	0.03	1.13
NANRC022	101	102	0.22	0.06	0.62
NANRC022	102	103	1.00	0.18	3.41
NANRC022	103	104	0.42	0.06	1.45
NANRC022	104	105	0.25	0.02	0.86
NANRC022	105	106	0.71	0.05	2.30
NANRC022	106	107	0.46	0.08	1.53
NANRC022	107	108	0.29	0.06	1.02
NANRC022	108	109	0.18	0.04	0.61
NANRC022	109	110	0.25	0.09	0.64
NANRC022	110	111	0.32	0.06	0.73
NANRC022	111	112	0.36	0.05	0.86
NANRC022	112	113	0.30	0.05	0.76
NANRC022	113	114	0.32	0.10	0.76
NANRC022	114	115	0.30	0.11	0.69
NANRC022	115	116	0.10	0.02	0.26
NANRC022	116	117	0.11	0.02	0.27
NANRC022	117	118	0.30	0.05	0.68
NANRC022	118	119	1.32	0.26	3.38
NANRC022	119	120	0.35	0.10	0.99
NANRC022	120	121	0.27	0.07	0.61
NANRC022	121	122	0.18	0.07	0.31
NANRC022	122	123	0.53	0.13	1.56
NANRC022	123	124	0.48	0.14	1.53
NANRC022	124	125	0.35	0.13	0.84
NANRC022	125	126	0.23	0.05	0.52
NANRC022	126	127	0.54	0.15	1.23
NANRC022	132	133	0.35	0.05	1.24
NANRC022	135	136	0.11	0.02	0.25
NANRC022	137	138	0.16	0.04	0.48
NANRC022	138	139	0.27	0.08	0.59
NANRC022	139	140	0.28	0.08	0.65
NANRC022	140	141	0.23	0.07	0.58
NANRC022	142	143	0.12	0.04	0.31
NANRC022	143	144	0.36	0.08	1.02
NANRC022	144	145	0.11	0.03	0.38
NANRC022	148	149	0.24	0.07	0.55
NANRC022	149	150	0.52	0.17	1.16
NANRC022	150	151	0.20	0.05	0.46
NANRC022	152	153	0.23	0.04	0.68
NANRC022	181	182	0.52	0.14	1.72

Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC022	182	183	0.25	0.06	0.66
NANRC022	183	184	0.16	0.04	0.39
NANRC022	184	185	0.13	0.04	0.44
NANRC022	186	187	0.44	0.05	1.85
NANRC022	187	188	0.55	0.08	1.79
NANRC022	188	189	0.25	0.03	0.85
NANRC022	189	190	0.28	0.06	0.89
NANRC022	192	193	0.27	0.05	0.82
NANRC022	194	195	0.16	0.06	0.44
NANRC022	196	197	0.41	0.14	1.08
NANRC022	197	198	0.11	0.03	0.28
NANRC022	200	201	0.17	0.07	0.47
NANRC022	201	202	0.39	0.19	1.19
NANRC022	202	203	0.42	0.13	0.99
NANRC022	203	204	0.16	0.05	0.37
NANRC022	204	205	0.22	0.05	0.58
NANRC022	205	206	0.20	0.03	0.53
NANRC022	206	207	0.14	0.02	0.37
NANRC022	207	208	0.20	0.04	0.72
NANRC022	208	209	0.17	0.03	0.51
NANRC022	209	210	0.29	0.05	0.79
NANRC022	210	211	0.26	0.06	0.76
NANRC022	211	212	0.17	0.02	0.51
NANRC022	212	213	0.18	0.05	0.43
NANRC022	213	214	0.22	0.05	0.53
NANRC022	214	215	0.50	0.11	1.32
NANRC022	215	216	0.34	0.11	0.82
NANRC022	216	217	0.26	0.07	0.65
NANRC022	217	218	0.21	0.07	0.45
NANRC022	218	219	0.30	0.11	0.62
NANRC022	219	220	0.32	0.08	0.69
NANRC022	220	221	0.21	0.08	0.51
NANRC022	221	222	0.15	0.04	0.32
NANRC022	222	223	0.32	0.03	0.65
NANRC022	225	226	0.28	0.11	0.51
NANRC022	226	227	0.39	0.20	0.82
NANRC022	227	228	0.50	0.20	0.92
NANRC022	228	229	0.37	0.12	1.54
NANRC022	229	230	0.53	0.18	1.50
NANRC022	230	231	0.52	0.14	1.48
NANRC022	231	232	0.50	0.10	1.36
NANRC023	5	6	0.61	0.07	0.41
NANRC023	6	7	0.19	0.02	0.49
NANRC023	7	8	0.38	0.07	0.58
NANRC023	8	9	0.32	0.05	0.42
NANRC023	9	10	0.23	0.05	0.63
NANRC023	10	11	0.34	0.06	0.52
NANRC023	11	12	0.26	0.08	0.61
NANRC023	12	13	0.67	0.16	0.52
NANRC023	13	14	0.27	0.03	0.33
NANRC023	14	15	0.30	0.04	0.48



Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC023	15	16	0.19	0.03	0.41
NANRC023	16	17	0.23	0.03	0.26
NANRC023	17	18	0.29	0.08	0.33
NANRC023	18	19	0.47	0.29	0.59
NANRC023	19	20	0.27	0.06	0.34
NANRC023	20	21	0.29	0.09	0.58
NANRC023	21	22	0.20	0.05	0.37
NANRC023	22	23	0.29	0.07	0.37
NANRC023	23	24	0.17	0.04	0.27
NANRC023	24	25	0.31	0.08	0.52
NANRC023	25	26	0.23	0.04	0.40
NANRC023	26	27	0.24	0.09	0.41
NANRC023	27	28	0.21	0.04	0.48
NANRC023	30	31	0.11	0.05	0.26
NANRC023	31	32	0.12	0.03	0.28
NANRC023	32	33	0.16	0.05	0.24
NANRC023	33	34	0.17	0.03	0.27
NANRC023	39	40	0.11	X	0.26
NANRC023	41	42	0.11	0.01	1.23
NANRC023	47	48	0.27	0.05	0.78
NANRC023	48	49	1.13	0.14	3.80
NANRC023	49	50	0.89	0.15	2.39
NANRC023	50	51	0.21	0.03	0.66
NANRC023	51	52	0.14	0.01	0.36
NANRC023	56	57	0.47	0.13	1.12
NANRC023	57	58	0.23	0.06	0.44
NANRC023	58	59	0.35	0.11	0.77
NANRC023	59	60	0.37	0.09	0.76
NANRC023	60	61	0.25	0.07	0.70
NANRC023	61	62	0.16	0.02	0.33
NANRC023	62	63	0.12	0.01	0.27
NANRC023	63	64	0.31	0.04	0.76
NANRC023	64	65	0.52	0.17	1.13
NANRC023	65	66	0.73	0.17	1.83
NANRC023	66	67	0.10	0.03	0.26
NANRC023	68	69	0.33	0.09	0.82
NANRC023	69	70	1.03	0.36	2.75
NANRC023	70	71	0.36	0.08	0.97
NANRC023	71	72	0.17	0.05	0.42
NANRC023	72	73	0.13	0.04	0.31
NANRC023	74	75	0.11	0.02	0.30
NANRC023	75	76	0.23	0.04	0.56
NANRC023	76	77	0.24	0.08	0.63
NANRC023	77	78	0.15	0.07	0.40
NANRC023	80	81	0.19	0.01	0.53
NANRC023	81	82	0.28	0.05	0.92
NANRC023	82	83	0.24	0.04	0.58
NANRC023	82	83	0.29	0.05	0.75
NANRC023	83	84	0.46	0.13	1.14
NANRC023	84	85	0.11	0.03	0.26
NANRC023	85	86	0.12	0.14	0.34

Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC023	86	87	0.18	0.04	0.46
NANRC023	87	88	0.75	0.19	1.98
NANRC023	88	89	0.12	0.03	0.28
NANRC023	89	90	0.33	0.04	0.77
NANRC023	90	91	0.19	0.05	0.42
NANRC023	92	93	0.20	0.04	0.38
NANRC023	93	94	0.21	0.07	0.38
NANRC023	94	95	0.25	0.08	0.47
NANRC023	95	96	0.29	0.10	0.50
NANRC023	96	97	0.21	0.06	0.44
NANRC023	97	98	0.17	0.05	0.27
NANRC023	98	99	0.18	0.06	0.39
NANRC023	99	100	0.18	0.07	0.40
NANRC023	100	101	0.22	0.06	0.52
NANRC023	101	102	0.15	0.05	0.37
NANRC023	102	103	0.56	0.16	1.42
NANRC023	103	104	0.32	0.10	0.72
NANRC023	104	105	0.29	0.12	0.62
NANRC023	105	106	0.36	0.12	0.79
NANRC023	105	106	0.33	0.12	0.73
NANRC023	106	107	0.37	0.10	0.76
NANRC023	107	108	0.57	0.15	1.30
NANRC023	108	109	0.31	0.10	0.65
NANRC023	109	110	0.26	0.10	0.47
NANRC023	110	111	0.38	0.12	1.16
NANRC023	111	112	0.37	0.11	0.75
NANRC023	112	113	0.32	0.11	0.58
NANRC023	113	114	0.51	0.18	1.04
NANRC023	114	115	0.49	0.16	0.99
NANRC023	115	116	0.61	0.18	1.38
NANRC023	116	117	0.64	0.21	1.39
NANRC023	117	118	0.50	0.19	0.96
NANRC023	118	119	0.28	0.09	0.56
NANRC023	119	120	0.42	0.14	0.81
NANRC023	120	121	0.20	0.09	0.33
NANRC023	121	122	0.24	0.08	0.40
NANRC023	122	123	0.21	0.08	0.48
NANRC023	125	126	0.12	0.03	0.71
NANRC023	126	127	0.20	0.04	0.56
NANRC023	127	128	0.20	0.04	0.53
NANRC023	128	129	0.19	0.06	0.48
NANRC023	129	130	0.26	0.08	0.75
NANRC023	130	131	0.20	0.05	0.58
NANRC023	133	134	0.12	0.03	0.36
NANRC023	135	136	0.35	0.11	0.73
NANRC023	136	137	0.53	0.12	1.20
NANRC023	137	138	0.10	0.03	0.20
NANRC023	139	140	0.11	0.03	0.25
NANRC023	144	145	0.10	0.03	0.23
NANRC023	145	146	0.18	0.03	0.66
NANRC023	146	147	0.21	0.03	0.68



Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC023	147	148	0.33	0.02	0.90
NANRC023	148	149	0.35	0.01	0.97
NANRC023	149	150	1.11	0.04	3.60
NANRC023	155	156	0.40	0.08	2.23
NANRC023	156	157	0.19	0.05	0.76
NANRC023	157	158	0.23	0.07	0.70
NANRC023	158	159	0.59	0.13	1.78
NANRC023	159	160	0.34	0.07	0.89
NANRC023	160	161	0.20	0.05	0.60
NANRC023	161	162	0.15	0.03	0.42
NANRC023	162	163	0.10	0.02	0.32
NANRC023	163	164	1.63	5.75	6.46
NANRC023	164	165	0.34	0.19	1.16
NANRC023	165	166	0.30	0.09	0.73
NANRC023	166	167	0.37	0.09	1.00
NANRC023	167	168	2.08	0.29	5.53
NANRC023	168	169	4.32	0.66	10.39
NANRC023	169	170	0.62	0.20	1.54
NANRC023	170	171	1.42	0.20	3.44
NANRC023	171	172	0.28	0.06	0.72
NANRC023	172	173	0.47	0.20	1.27
NANRC023	173	174	0.24	0.04	0.68
NANRC023	174	175	0.78	0.07	2.23
NANRC023	175	176	0.77	0.11	2.34
NANRC023	176	177	0.62	0.10	1.81
NANRC023	177	178	0.31	0.04	0.86
NANRC023	178	179	0.37	0.07	1.10
NANRC023	179	180	0.20	0.05	0.61
NANRC023	180	181	0.28	0.05	0.94
NANRC023	181	182	0.22	0.06	0.76
NANRC023	182	183	0.15	0.03	0.46
NANRC023	183	184	0.76	0.12	2.32
NANRC023	184	185	0.34	0.10	0.96
NANRC023	185	186	0.31	0.07	0.70
NANRC023	186	187	0.46	0.10	1.15
NANRC023	187	188	0.17	0.06	0.48
NANRC023	188	189	0.43	0.12	1.31
NANRC023	189	190	0.21	0.09	0.59
NANRC023	192	193	0.19	0.32	0.52
NANRC024	9	10	0.17	0.01	0.85
NANRC024	10	11	0.14	0.03	0.53
NANRC024	12	13	0.10	0.04	0.46
NANRC024	13	14	0.14	0.06	0.36
NANRC024	14	15	0.14	0.07	0.21
NANRC024	15	16	0.21	0.04	0.38
NANRC024	16	17	0.18	0.01	0.58
NANRC024	17	18	0.24	0.20	0.60
NANRC024	18	19	0.27	0.20	1.16
NANRC024	19	20	0.19	0.15	1.73
NANRC024	22	23	0.18	0.22	1.18
NANRC024	23	24	0.35	0.25	0.62

Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC024	24	25	0.30	0.12	1.00
NANRC024	25	26	0.31	0.32	0.70
NANRC024	26	27	0.32	0.13	0.42
NANRC024	27	28	0.26	0.05	0.71
NANRC024	28	29	0.23	0.01	0.57
NANRC024	29	30	0.17	0.01	0.56
NANRC024	30	31	0.18	0.02	0.78
NANRC024	31	32	0.28	0.06	0.85
NANRC024	32	33	0.13	0.01	0.69
NANRC024	38	39	0.22	0.02	0.91
NANRC024	39	40	0.26	0.03	0.63
NANRC024	40	41	0.26	0.02	0.34
NANRC024	41	42	0.15	0.01	0.39
NANRC024	47	48	0.17	0.01	0.29
NANRC024	54	55	0.56	0.01	2.14
NANRC024	56	57	0.62	0.02	2.71
NANRC024	57	58	0.44	0.01	1.29
NANRC024	60	61	0.12	0.01	0.35
NANRC024	71	72	0.13	0.01	0.23
NANRC024	81	82	0.12	0.01	0.32
NANRC024	84	85	0.10	0.01	0.21
NANRC024	92	93	0.14	0.01	0.38
NANRC024	111	112	0.31	0.08	1.77
NANRC024	114	115	0.12	0.04	0.61
NANRC024	121	122	0.13	0.03	0.38
NANRC024	125	126	0.18	0.05	0.49
NANRC024	126	127	0.17	0.05	0.42
NANRC024	129	130	0.18	0.02	1.24
NANRC024	192	193	0.55	0.13	1.68
NANRC024	193	194	0.27	0.04	0.81
NANRC024	194	195	0.29	0.02	0.87
NANRC024	199	200	0.39	0.02	1.20
NANRC024	221	222	0.11	0.01	0.26
NANRC024	225	226	0.19	0.01	0.67
NANRC024	226	227	0.43	0.08	1.08
NANRC024	227	228	0.24	0.06	0.54
NANRC024	228	229	0.26	0.05	0.67
NANRC024	229	230	0.39	0.08	1.19
NANRC024	230	231	0.31	0.05	0.79
NANRC024	231	232	0.46	0.09	1.03
NANRC024	232	233	0.17	0.03	0.36
NANRC024	233	234	0.22	0.06	0.45
NANRC024	234	235	0.13	0.04	0.29
NANRC024	235	236	0.16	0.06	0.36
NANRC024	236	237	0.20	0.04	0.47
NANRC024	237	238	0.34	0.11	0.80
NANRC024	238	239	0.32	0.07	0.80
NANRC024	239	240	0.22	0.04	0.54
NANRC024	240	241	0.28	0.07	0.66
NANRC024	241	242	0.22	0.06	0.49
NANRC024	242	243	0.24	0.05	0.60



Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC024	243	244	0.19	0.03	0.68
NANRC024	244	245	0.11	0.03	0.22
NANRC024	245	246	0.16	0.05	0.28
NANRC024	257	258	0.40	0.09	0.70
NANRC024	258	259	0.19	0.02	0.33
NANRC024	260	261	0.14	0.06	0.30
NANRC024	261	262	0.18	0.07	0.30
NANRC024	262	263	0.16	0.07	0.32
NANRC024	263	264	0.16	0.06	0.34
NANRC024	264	265	0.18	0.07	0.31
NANRC024	265	266	0.17	0.06	0.29
NANRC024	266	267	0.11	0.05	0.21
NANRC024	270	271	1.04	0.05	3.72
NANRC024	271	272	0.39	0.02	1.44
NANRC024	272	273	0.13	0.02	0.39
NANRC024	273	274	0.43	0.16	1.37
NANRC024	274	275	0.21	0.06	0.79
NANRC024	275	276	0.26	0.08	0.97
NANRC024	276	277	0.25	0.05	0.87
NANRC024	277	278	0.28	0.08	1.32
NANRC024	278	279	0.26	0.07	1.24
NANRC024	298	299	1.05	0.22	3.04
NANRC025	5	6	0.14	0.02	0.11
NANRC025	6	7	0.22	0.02	0.12
NANRC025	7	8	0.23	0.05	0.12
NANRC025	12	13	0.16	0.04	0.13
NANRC025	20	21	0.18	0.06	0.18
NANRC025	36	37	0.12	0.03	0.39
NANRC025	37	38	0.37	0.09	0.97
NANRC025	98	99	0.10	0.05	0.23
NANRC025	99	100	0.15	0.05	0.37
NANRC025	120	121	0.15	0.04	0.37
NANRC025	173	174	0.36	0.09	0.73
NANRC025	174	175	0.11	0.02	0.22
NANRC025	198	199	0.11	0.04	0.36
NANRC025	204	205	0.17	0.05	0.56
NANRC026	1	2	0.40	0.16	0.51
NANRC026	2	3	0.91	0.22	0.30
NANRC026	3	4	0.47	0.13	0.99
NANRC026	4	5	0.36	0.10	0.72
NANRC026	5	6	0.13	0.03	0.71
NANRC026	7	8	0.25	0.04	0.38
NANRC026	8	9	0.32	0.10	0.60
NANRC026	14	15	0.27	0.10	0.29
NANRC026	15	16	0.39	0.10	0.95
NANRC026	16	17	0.23	0.08	0.61
NANRC026	17	18	0.31	0.09	1.88
NANRC026	18	19	0.47	0.12	0.70
NANRC026	22	23	0.10	0.02	0.35
NANRC026	32	33	0.14	0.02	0.22
NANRC026	33	34	0.16	0.02	0.12

Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC026	34	35	0.11	0.01	0.11
NANRC026	35	36	0.36	0.11	1.82
NANRC026	69	70	0.47	0.17	3.91
NANRC026	70	71	0.21	0.07	0.89
NANRC026	71	72	0.30	0.14	1.13
NANRC026	74	75	0.18	0.03	0.64
NANRC026	75	76	0.41	0.09	1.16
NANRC026	77	78	0.14	0.04	0.36
NANRC026	87	88	0.23	0.08	1.26
NANRC026	88	89	0.20	0.04	0.99
NANRC026	89	90	0.33	0.12	1.79
NANRC026	91	92	0.28	0.09	1.46
NANRC026	92	93	0.40	0.09	2.10
NANRC026	93	94	0.33	0.10	1.76
NANRC026	94	95	0.55	0.14	2.72
NANRC026	95	96	0.79	0.26	3.40
NANRC026	96	97	0.60	0.15	1.89
NANRC026	97	98	0.50	0.14	1.39
NANRC026	98	99	0.58	0.13	1.45
NANRC026	99	100	0.37	0.09	1.13
NANRC026	100	101	0.13	0.02	0.42
NANRC026	101	102	0.26	0.10	0.89
NANRC026	102	103	0.23	0.08	0.62
NANRC026	103	104	0.56	0.15	1.38
NANRC026	104	105	0.61	0.19	1.85
NANRC026	104	105	0.57	0.15	1.41
NANRC026	105	106	0.82	0.23	1.89
NANRC026	106	107	0.75	0.12	1.86
NANRC026	107	108	0.56	0.11	1.41
NANRC026	108	109	0.34	0.09	1.00
NANRC026	109	110	0.27	0.09	0.62
NANRC026	110	111	0.33	0.14	0.82
NANRC026	112	113	0.40	0.15	1.06
NANRC026	113	114	0.34	0.13	1.03
NANRC026	114	115	0.17	0.09	0.66
NANRC026	115	116	0.85	0.24	3.23
NANRC026	116	117	0.44	0.07	5.79
NANRC026	117	118	0.19	0.04	0.48
NANRC026	118	119	0.28	0.08	0.68
NANRC026	119	120	0.14	0.03	0.34
NANRC026	120	121	0.17	0.03	0.54
NANRC026	122	123	0.26	0.08	0.64
NANRC026	123	124	0.26	0.08	0.61
NANRC026	124	125	0.22	0.04	0.52
NANRC026	125	126	0.14	0.02	0.36
NANRC026	126	127	0.13	0.04	0.21
NANRC026	127	128	0.30	0.09	0.92
NANRC026	128	129	0.66	0.19	2.01
NANRC026	130	131	0.32	0.06	0.99
NANRC026	138	139	0.20	0.06	0.49
NANRC026	159	160	0.15	0.02	0.37



Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC026	162	163	0.14	0.06	0.28
NANRC026	163	164	0.22	0.07	0.39
NANRC026	164	165	0.32	0.11	0.66
NANRC026	165	166	0.48	0.13	0.95
NANRC026	166	167	0.12	0.02	0.15
NANRC026	171	172	0.61	0.13	1.25
NANRC026	172	173	0.73	0.22	1.49
NANRC026	173	174	0.20	0.07	0.41
NANRC026	179	180	0.66	0.13	1.37
NANRC026	180	181	0.99	0.18	1.93
NANRC026	181	182	0.33	0.11	0.70
NANRC026	182	183	0.44	0.12	0.80
NANRC026	183	184	0.47	0.11	0.97
NANRC026	184	185	0.69	0.37	1.26
NANRC026	185	186	0.19	0.05	0.37
NANRC026	186	187	0.41	0.15	0.76
NANRC026	187	188	0.46	0.11	0.80
NANRC026	188	189	0.40	0.09	0.76
NANRC026	189	190	0.58	0.15	1.06
NANRC026	190	191	0.39	0.11	0.74
NANRC026	191	192	0.45	0.20	0.88
NANRC026	192	193	0.24	0.08	0.44
NANRC026	193	194	0.32	0.09	0.57
NANRC026	194	195	0.43	0.43	0.87
NANRC026	195	196	0.33	0.12	0.59
NANRC026	196	197	0.29	0.11	0.54
NANRC026	197	198	0.68	0.19	1.22
NANRC026	200	201	0.25	0.07	0.44
NANRC026	201	202	0.83	0.36	1.47
NANRC026	202	203	0.16	0.05	0.25
NANRC026	203	204	0.28	0.44	0.44
NANRC026	204	205	0.50	0.13	0.86
NANRC026	205	206	0.56	0.15	0.93
NANRC026	206	207	0.16	0.04	0.27
NANRC026	208	209	0.14	0.04	0.26
NANRC026	212	213	0.27	0.06	0.92
NANRC026	213	214	0.12	0.05	0.18
NANRC026	224	225	0.12	0.07	0.26
NANRC026	225	226	0.10	0.04	0.19
NANRC026	226	227	0.27	0.08	0.48
NANRC026	227	228	0.41	0.13	0.79
NANRC026	228	229	0.77	0.24	1.54
NANRC026	229	230	0.81	0.20	1.42
NANRC026	230	231	0.83	0.22	1.40
NANRC026	231	232	0.50	0.10	0.87
NANRC026	232	233	0.50	0.21	0.92
NANRC026	233	234	1.04	0.41	2.03
NANRC026	234	235	0.39	0.10	0.72
NANRC026	235	236	0.28	0.09	0.51
NANRC026	236	237	0.13	0.05	0.24
NANRC026	237	238	0.27	0.20	0.58

Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC026	238	239	0.72	0.18	1.57
NANRC026	239	240	1.09	0.23	2.32
NANRC026	240	241	0.47	0.22	1.13
NANRC026	241	242	0.54	0.22	1.08
NANRC026	242	243	0.54	0.17	1.01
NANRC026	243	244	0.45	0.13	0.84
NANRC026	244	245	0.30	0.11	0.55
NANRC026	245	246	0.20	0.14	0.41
NANRC026	246	247	0.17	0.06	0.36
NANRC026	247	248	0.48	0.15	0.87
NANRC026	248	249	0.56	0.20	1.55
NANRC026	249	250	0.25	0.09	0.51
NANRC026	250	251	0.12	0.04	0.23
NANRC026	251	252	0.34	0.17	0.69
NANRC026	252	253	0.24	0.09	0.51
NANRC026	253	254	0.18	0.07	0.32
NANRC026	254	255	0.13	0.05	0.24
NANRC026	255	256	0.22	0.08	0.40
NANRC026	256	257	0.24	0.08	0.43
NANRC026	257	258	0.14	0.05	0.26
NANRC026	260	261	0.11	0.04	0.18
NANRC026	261	262	0.14	0.03	0.22
NANRC026	262	263	0.46	0.14	0.86
NANRC026	263	264	0.63	0.19	1.16
NANRC026	264	265	0.32	0.11	0.58
NANRC026	265	266	0.26	0.09	0.50
NANRC026	266	267	0.44	0.11	0.80
NANRC026	267	268	0.15	0.02	0.27
NANRC026	269	270	0.19	0.06	0.32
NANRC026	270	271	0.29	0.05	0.43
NANRC026	271	272	1.45	0.56	2.45
NANRC026	272	273	0.43	0.11	0.65
NANRC026	273	274	0.23	0.06	0.38
NANRC026	274	275	0.27	0.08	0.37
NANRC026	275	276	1.65	0.59	2.28
NANRC026	277	278	0.21	0.04	0.42
NANRC026	278	279	0.12	0.01	0.15
NANRC027	9	10	0.10	0.02	0.17
NANRC027	20	21	0.15	0.03	0.48
NANRC027	29	30	0.50	0.18	1.66
NANRC027	30	31	0.12	0.06	0.43
NANRC027	31	32	0.26	0.07	0.75
NANRC027	33	34	0.21	0.07	0.51
NANRC027	34	35	0.31	0.22	0.82
NANRC027	35	36	0.58	0.17	1.34
NANRC027	36	37	0.22	0.10	0.44
NANRC027	38	39	0.16	0.05	0.29
NANRC027	39	40	0.39	0.18	0.74
NANRC027	40	41	0.22	0.13	0.47
NANRC027	41	42	0.25	0.11	0.49
NANRC027	42	43	0.14	0.07	0.23



Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC027	43	44	0.26	0.08	0.70
NANRC027	44	45	0.66	0.24	1.47
NANRC027	45	46	0.28	0.10	0.59
NANRC027	46	47	0.31	0.14	0.71
NANRC027	53	54	0.16	0.05	0.56
NANRC027	61	62	0.15	0.02	0.65
NANRC027	62	63	0.16	0.07	0.52
NANRC027	64	65	0.15	0.06	0.46

Hole ID	From	To	Cu%	Au ppm	Ag ppm
NANRC027	66	67	0.14	0.06	0.42
NANRC027	67	68	0.20	0.08	0.45
NANRC027	71	72	0.18	0.06	0.33
NANRC027	72	73	0.13	0.05	0.24
NANRC027	74	75	0.30	0.05	0.67
NANRC027	75	76	0.17	0.04	0.46
NANRC027	96	97	0.18	0.07	0.28

Appendix 1: Nanadie RC Drilling – Table 1 (JORC Code, 2012)

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
<i>Sampling techniques</i>	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	For reverse circulation (RC) drilling, every 1m sample was cone split into clean pre-numbered calico bags from the rig-mounted cyclone/splitter and remaining sample ground-dumped mostly in rows of 30. Each 5m composite sample was collected from the relevant individual 1m sample piles with a spear and placed into a clean hand-written calico sample bag. For composite samples, proportional amounts of material were collected from each sample pile to create the composite. All sampling was undertaken by Solstice staff.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	A QAQC sample is inserted at a rate of 1 in 25 primary samples (Certified Reference Material or Blank QAQC sample), also field Duplicates were inserted at a rate of 1 in 25 Primary samples. Appropriate certified reference materials (CRM) were supplied by OREAS Pty Ltd and Blank material was commercially purchased clean builder's sand. Analysis of QAQC samples inserted by the Company is undertaken to monitor sample representivity and independent laboratory conditions. The CRMs used by the Company are grade and matrix matched as close as possible to interpreted geology. The laboratory (Intertek) also performed its own internal checks including insertion of pulp duplicate, standard, and repeat samples as required. Duplicate samples for RC drilling were collected at the drill site and inserted into the sample stream at a frequency of 1 in 25 Primary samples. The Duplicates were sampled directly at the drill rig along with the Primary samples, with the Duplicate samples split via cone splitter.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation</i>	For RC drilling 1m samples were collected in a clean pre-numbered calico bag via a rig-mounted cyclone/splitter with the bulk sample collected into a plastic bucket and laid out on a cleared area of ground in rows of 30 samples. Each 1m split sample is approximately 2-3kg and representative of the metre drilled. All samples are weighed as-received by the laboratory. Each 5m composite sample is collected from each 1m sample pile over the relevant interval using a spear and proportional amounts placed into a hand-written calico sample bag to make up an approximate 2-3kg sample.



Criteria	JORC Code explanation	Commentary
	<i>types (eg submarine nodules) may warrant disclosure of detailed information</i>	
<i>Drilling techniques</i>	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	The RC drilling was undertaken by an independent contractor, Raglan Drilling, using a custom-built Schramm Rotadrill (T685W), truck mounted drill rig. The drill string comprised 6m rods with a standard 5.5inch face sampling RC bit. Each hole was drilled to or near its planned depth. Each drillhole was supervised by a Solstice geologist.
<i>Drill sample recovery</i>	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	The RC sample recoveries for each metre were visually assessed by the geologist on site and estimated to be within industry acceptable standards. Moisture content (wet, dry, moist) was recorded in drill logs.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	Ground water was encountered in every hole but samples are predominantly dry. The RC drill rig utilised an onboard 350psi compressor and 1150cfm air pack, and a separate auxiliary 350psi/1150cfm booster air pack and compressor which typically provided dry and representative samples with good recovery.
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No relationship appears to exist between recovery and grade and no bias is noted between assay grades and sample mass.
<i>Logging</i>	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Geological logging was undertaken by a Solstice geologist during drilling and is considered appropriately detailed for this phase of exploration. Geotechnical logging has not been undertaken at this stage.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	Logging of RC drill samples included lithology, alteration, sulphide mineralisation and structural fabric, and is considered qualitative in nature. Transported cover and regolith types were also defined. The logging is considered appropriate for this phase of exploration.
	<i>The total length and percentage of the relevant intersections logged.</i>	The RC drillhole samples are logged 100% from surface to the end of hole (EOH) in detail with chip samples collected for every metre in chip trays for archive and future reference. Geological events such as bottom of transported cover, base of complete oxidation, water table, and top of fresh rock are also recorded. The logging is considered appropriate to this phase of exploration.
<i>Sub-sampling techniques and sample preparation</i>	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	No core drilling was completed.
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	The composite RC drill samples were spear sampled from piles laid out on the ground at the drill site. The majority of samples were collected dry, with very few collected wet or moist. One metre resamples are from samples collected directly from the rig-mounted cyclone/splitter and laid out with the relevant ground dumped sample. The one metre samples are collected in pre-numbered clean calico bags.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	For RC drilling, one metre resamples are from samples collected directly from the rig-mounted cyclone/splitter and laid out with the relevant ground dumped sample. The samples were sent to independent laboratory, Intertek, where samples were oven dried at 100C, crushed and pulverised to 85% of total sample passing 75µm, using the SP03 or SP05 methods. The nature and quality of the sample preparation are considered appropriate.



Criteria	JORC Code explanation	Commentary
		5m composite samples were collected from unmineralised granite where identified by the geologist. Each sample was collected with a spear. These are standard industry practices for this phase of exploration.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	On site, field Duplicate samples are taken at a rate of 1 in 25 Primary samples based on the Company's QAQC procedures, which requires either a CRM, Blank or Duplicate be inserted in the sample stream at least every 25th Primary sample. The CRMs used by the Company are sourced from Geostats Pty Ltd and Oreas™ and are of copper and gold grade and matrix that matched as close as possible to the interpreted geology. At the laboratory stage, internal QAQC pulp duplicates are taken at a rate of 1 in 28 by Intertek. Appropriate CRM material and Control Blanks are also inserted and assessed by Intertek for internal laboratory QAQC. The QAQC Intertek inserted sample data are evaluated by Solstice's independent database manager, Core Geoscience Pty Ltd.
	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Field Duplicate samples were collected during RC drilling and inserted into the sample batches to check and ensure representivity of sample methods. Pulp repeats and element repeats for all sample types are undertaken by Intertek at the laboratory. The QAQC field inserted sample data are evaluated by Solstice's independent database manager, Core Geoscience Pty Ltd.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample mass for RC drilling of nominally 1.5–3kg for each sample is considered appropriate for the rock type and style of mineralisation.
Quality of assay data and laboratory tests	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Laboratory assaying for all drill sample types is undertaken by Intertek, an ISO 9001 certified laboratory. All samples were subjected to a Fire Assay on a 50g charge with an ICP-OES finish with 5ppb detection limit for gold. Additionally, copper and silver were assayed using a Four Acid digest on a 25g charge with an ICP-MS/OES finish as appropriate.
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No geophysical tools were used in the field in determining any element analysis.
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	During drilling, field Duplicates are taken on site for samples using the same method as the Primary sample (i.e. spear/cyclone) from piles laid out on the ground or from the cyclone directly as appropriate. At the laboratory Intertek also performed internal checks including insertion of pulp duplicates, CRMs, control blanks and repeats as required. Internal screen checks are also performed to ensure the mass percent passing 75µm is consistently high. The Competent Person is satisfied acceptable levels of accuracy and precision have been established.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Significant intersections being reported have been checked by experienced, senior Solstice geologists.
	<i>The use of twinned holes.</i>	No twinning of holes was undertaken.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	The primary lithological data for RC drilling is collected by a Company geologist in the field recording it directly into a database logging sheet on a Toughbook laptop. Data is entered into pre-defined MS Excel based log sheets following the Company's documented internal geological protocols and procedures manual. Validation measures for the field data are built into the MS Excel based log sheets. Sample logs are recorded on paper sheets in the field. Sample data is entered into the



Criteria	JORC Code explanation	Commentary
		database from the sample sheets and provided to the database manager for alignment of assay data. Field data is backed-up each day with logs stored in the Company database hosted on a server. Field data is first verified by senior Company geologists and then sent electronically to Solstice's independent data management company, Core Geoscience Pty Ltd, for incorporation into a Master Database. Core Geoscience conducts several phases of field log data validation to ensure consistency and completeness. The subsequent validated and compiled dataset is exported into appropriate formats (MS Access and Micromine™) for use by Company geologists. Laboratory data is provided electronically to the Company and Core Geoscience Pty Ltd and is validated and imported by Core Geoscience into the Master Database. Data is supplied by Intertek as ASCII text file spreadsheets and PDF certificates signed by the relevant laboratory manager.
	<i>Discuss any adjustment to assay data.</i>	No adjustments have been made to any laboratory assay results.
<i>Location of data points</i>	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	The initial location of RC drill collars is recorded using a handheld Garmin GPS-Map unit with an accuracy of +/-3m, using MGA94 Zone 50 South. This method is considered appropriate for this phase of exploration drilling. Downhole surveys were conducted by trained Raglan Drilling personnel immediately after the completion of every RC hole using a REFLEX Sprint, North Seeking survey tool referenced to True North. No Mineral Resources Estimate work has been undertaken.
	<i>Specification of the grid system used.</i>	All drill hole data is recorded in GDA94, zone 50.
	<i>Quality and adequacy of topographic control.</i>	Past explorer Cyprum commissioned a topographic survey in February 2021 completed by Arvista Surveys. A Digital Terrain Model (DTM) was constructed using the data from the aerial survey as well as from existing drillhole surveys and adjusted where low accuracy hand-held GPS pickups created obvious anomalies in the low relief areas of the project.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i>	Drillhole spacing nominally at 20-30m x 20-30m is considered by the Competent Person to be appropriate for the magmatic layered intrusive copper mineralisation being targeted at Nanadie Well.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Past explorer Intermin considered the data spacing 40 to 50m x 20 to 30m to be sufficient to define mineralisation to a 2004 JORC Code Compliant Inferred Resource confidence level in 2013. Cyprum completed infill and extensional drilling to close the drill spacing to a nominal 25m x 25m pattern. This new closer spacing is considered to be more than sufficient to define a 2012 JORC Inferred Mineral Resource Estimate for Nanadie. No updates are being made to the Mineral Resource Estimate at this time.
	<i>Whether sample compositing has been applied.</i>	Where required, a 5m composite sample was collected from each 1m sample pile over the relevant interval using a spear and proportional amounts placed into a hand-written calico sample bag.
<i>Orientation of data in relation to geological structure</i>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Initial RAB drilling by Newcrest (1996), Dominion (1999) and Intermin (2003) was drilled on 060-240° bearing drill lines but the bulk of the subsequent drilling was drilled on east-west drill lines. The drill angle is considered adequate to test the Nanadie Well mineralisation. A number of scissor holes have also been drilled. The strike of the Nanadie Well mineralisation is north to north-northwest and the Cyprum 2020-2021 drilling pattern was designed to achieve unbiased sampling along the strike of the deposit. The horizontal to low angle nature of the oxide/supergene mineralisation was not biased by the use of vertical RC drillholes. The first two holes from the 2020-2021 diamond drill program were drilled at -60 and -80° dip angles to the west with the third hole drilled at -65° to the east and the fourth hole -63° to the east and the fifth hole drilled at -60° to the east. The regional schists and gneisses dip steeply (75°) to the east-northeast but the foliation within the layered intrusives



Criteria	JORC Code explanation	Commentary
		is steep (60-80) to the west-southwest. Further, secondary sulphide veinlets are observed in drill core dipping at 50 to 60° to the northeast. Further, structural analysis is required to determine a more optimum drill angle. The Competent Person is satisfied the orientation of sampling achieved unbiased sampling of structures.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	The current understanding of the Nanadie Well Cu-Au Deposit suggests that current drill orientation has not introduced any preferential sampling bias. The primary disseminated mineralisation appears to have been remobilised into the regional fabric and now dips to the west-southwest. Remobilised secondary sulphide veins are observed in the drill core dipping to the northeast. Cross-cutting hydraulically brecciated potentially silver-rich fault structures dip to the north-northeast. Further work is required to determine the optimum drill angle and it is likely that several drill directions may be required to adequately test all the potential mineralised structural orientations at the Nanadie Well Project.
Sample security	<i>The measures taken to ensure sample security.</i>	Chain of sample custody is maintained by Solstice personnel. Samples were collected in calico bags which were then secured in numbered polyweave bags at the drill site. These polyweave bags were inserted into Bulka bags and then transported by Solstice staff directly to the Toll IPEC in Meekatharra for subsequent transportation to Intertek in Perth. These facilities have lockable yards to maintain security prior to sample processing. Sample submission documents listing the batch number, sample number and order number accompany the samples at each stage and are emailed directly to the laboratory managers. Samples are checked by Intertek to confirm receipt of all samples. If a discrepancy is noted, this is reported by the laboratory to Solstice.
Audits or reviews	<i>The results of any audits or reviews of sampling techniques and data.</i>	Internal reviews by experienced senior geologists of sampling techniques and data confirm that sampling has been conducted to industry standards.

Section 2 Reporting of Exploration Results

Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	Licences E51/1040 and M51/887 are granted and currently held by Cyprum Metals pending regulatory transfer to Solstice as 100% owner. Licence E51/1987 was granted 100% to Cyprum on 10/3/2021 and is also awaiting transfer. In addition to statutory State Government Royalties, additional royalties are payable to a syndicate comprising of W.S Hitch, K.W Wolzak, P.W Askins, and Tyson Resources PL of: <ul style="list-style-type: none"> • 0.735% of the revenue received from the sale of copper metal or copper in concentrate from the tenement, • 0.49% of the revenue received from the sale of any other metal, mineral or ore from the tenement.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The licences are in good standing and there are no known impediments to renewal of the licence or to obtaining any licence to operate.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	The area has seen extensive historical drilling, including a total of 184 historical RAB RC and/or diamond drillholes in the vicinity of the Nanadie MRE. In summary: Between 1976-1977 BHP Ltd. completed surface mapping, rock chip and soil sampling, 72 shallow 0.5 to 38m deep RAB drillholes targeting Cu, Ni & Zn and geophysical surveys. Between 1987-1993 Dominion Mining Ltd completed a total



Criteria	JORC Code explanation	Commentary
		<p>of 126 shallow RAB holes were drilled to the base of the cover and 9 shallow RC holes adjacent to historic workings to the north and south of the current MRE area.</p> <p>Between 1995-1996 Newcrest Mining Ltd. completed a total of 63 vertical RAB holes on 1km spaced lines with holes 300m apart on each drill line. A single fence of holes from this programme was drilled across the current Nanadie Inferred Resource that included the 23m deep discovery hole ER317-13 with 14m @ 1.2% Cu from 9m down hole.</p> <p>In 1999 Dominion Mining Ltd. drilled 3 fences of RAB holes across the known Nanadie deposit with holes 100m apart on section for a total of 14 drillholes. Their best results were 1m @ 0.7% Cu from holes 99NWAR009 from 8m and 99NWAR011 from 23m.</p> <p>In 2003, Intermin drilled 14 RAB holes that followed up the previously reported Newcrest and Dominion drill intercepts</p> <p>In 2004-2013 Intermin. drilled 95 RC holes 63 of which directly targeted the current Nanadie Well Inferred Resource area, the other 32 holes targeted areas outside the known MRE. During this period, they drilled 89 RAB holes of which 75 were outside the MRE area. In 2004, Intermin engaged Southern Geoscience to complete an Induced Polarisation survey at Nanadie Well. Seven lines were read on 200m section spacings north from 6994800mN. In 2006, Intermin engaged DF-EX Exploration Kalgoorlie to complete a ground magnetic survey using a GSM-19 Overhauser v7.0 total field magnetometer. In 2008, Intermin engaged GPX airborne to fly an airborne helicopter EM survey over the Nanadie Well E51/1040 for 99-line km survey using a bird mounted Geometrics G 822A Caesium vapor optically pumped magnetometer continuously sampling at 1200Hz, sensitive to 0.001nT. In 2012, Intermin commissioned Newexco to complete down hole EM surveys on 4 drill holes and a surface moving loop EM survey using an EMIT - SMARTem24 geophysical receiver.</p> <p>Results from 63 RC and 25 RAB (14 drilled by Intermin, 11 drilled by Newcrest and Dominion) holes were used by Intermin in the estimation of the 2004 JORC Code Compliant Inferred Resource of 36.07Mt @ 0.42% Cu & 0.064 g/t Au (Intermin, 2013).</p> <p>Mithril Ltd 2013-2019. Ground geophysical surveys. 35 RC drillholes into various targets outside Nanadie Resource area including the discovery of the Stark Prospect. Mithril also drilled 5 diamond drillholes but only one hole was drilled into Nanadie Resource area in 2017.</p> <p>Horizon Minerals Ltd drilled 14 RC holes into the Nanadie Resource area in 2019.</p> <p>Between 2020-2024 Cyprium completed 84 RC holes and 7 DD holes over the Nanadie Project licences which culminated in the definition of a JORC 2012 compliant Inferred Mineral Resource Estimate of 40.4Mt @ 0.4% Cu, 0.1g/t AU and 1.0g/t Ag at a cut-off grade of 0.25% copper.</p>
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	<p>The project lies within the Yilgarn Craton and is proximal to the eastern flank of the Murchison Domain within the broader Youanmi terrane.</p> <p>The Nanadie Copper-Gold deposit is hosted within the Barrambie Igneous Complex (BIC) which in turn, is part of the broader Meeline suite. The BIC is interpreted to be Mesoarchaen age, circa 2810Ma, and is intruded by Neoproterozoic granites and granodiorites (Ivanic et al., 2010).</p>



Criteria	JORC Code explanation	Commentary
		<p>The BIC is a 20km long elongate mafic intrusive sill that parallels a NE-SW trending shear that marks the eastern margin of the Murchison Domain (Ivanic et al., 2010). The igneous suite is described as east facing and dipping at 75° to the east-northeast (Ivanic et al., 2010). The Nanadie Well layered intrusive is within the BIC and composed of upper greenschist facies metamorphosed gabbro, leucogabbro, anorthosites and pyroxenites.</p> <p>Surrounding rocks at Nanadie consist of amphibolites, sheared chlorite-quartz-muscovite schists and gneisses and granite/granodiorite intrusive bodies that flank both sides of the Nanadie Well layered intrusive as well as forming irregular granitic dykes and pegmatites that crosscut the earlier mafic intrusives. There is a thin cover generally 0.5 to 6m of Quaternary aeolian sands, soil and calcrete.</p> <p>The primary copper mineralisation (chalcopyrite) at Nanadie Well is associated with with pyrite, pyrrhotite and rare pentlandite and minor precious metals including gold and lesser platinum and palladium. The primary disseminated sulphides and precious metals were later remobilised into the regional west-dipping shear foliation, most likely during regional folding and associated regional metamorphism.</p> <p>Flat lying to low angle oxide/supergene Cu/Au mineralisation occurs at the top of the current and paleo water table levels. The oxidised zone is marked mainly by iron-stained joint surfaces and some secondary Cu mineralisation dominantly malachite with lesser azurite.</p>
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. 	See Table 1 in body text.
	<p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<p>Not applicable, all information is included.</p> <p>The Competent Person is satisfied that drillhole information has been adequately considered, and material information has been appropriately described.</p>
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</p>	<p>Assay grades are length-weighted. The lower cut-off grade for copper assays is 0.2% and 0.1g/t for gold. No upper cut-off grade is applied.</p>
	<p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical</p>	<p>Aggregate intercepts reported are length-weighted. Intercepts and reported on the basis of minimum 10m interval at 0.4% copper and 5m maximum internal dilution.</p>



Criteria	JORC Code explanation	Commentary
	<p><i>examples of such aggregations should be shown in detail.</i></p> <p><i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i></p>	<p>Metal equivalent values are not currently being reported.</p>
<p><i>Relationship between mineralisation widths and intercept lengths</i></p>	<p><i>These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></p>	<p>Significant intercepts reported are downhole lengths only.</p>
<p><i>Diagrams</i></p>	<p><i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i></p>	<p>Figures in the main body of this release illustrate the Nanadie deposit mineralisation in both sectional, plan and isometric views and also indicate the variable drillhole angles and azimuths.</p>
<p><i>Balanced reporting</i></p>	<p><i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></p>	<p>All currently known significant drill assay data has been reported.</p>
<p><i>Other substantive exploration data</i></p>	<p><i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i></p>	<p>Other geological and geophysical work relating to Nanadie Well Project has been reported by previous operators. See ASX releases from Intermin Resources Limited (IRC), Mithril Ltd (MTH) and Horizon Minerals (HRZ). Other historical data can be located on the DEMIRS WAMEX report system.</p> <p>Cyprium completed an airborne magnetic and radiometric survey over the Nanadie Well E51/1040 licence in 2020. Thompson Aviation used a Cessna 210 aircraft flying at a 50m flight height to complete 3176km, 50m east-west line spaced survey. The survey used a Geometrics G822A magnetometer and a Radiation Solutions RSS00 Gamma Ray spectrometer.</p> <p>Downhole EM surveys were conducted on the 2020/21 diamond drill holes at Nanadie Well and Stark in February-March 2021. The EM survey was conducted with continuous sensing tool for electromagnetic conductance anomalies with an Atlantis slim line tri-axial fluxgate magnetometer.</p> <p>All geophysical methods utilised have been standard practice for the generation and acquisition of geophysical data in the resources industry.</p> <p>Other modifying factors such as the metallurgical characteristics, potential environmental factors, hydrological conditions and geotechnical factors have not been investigated at Nanadie Well Project at this point in time. These would be considered as part of future resource updates.</p>
<p><i>Further work</i></p>	<p><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and</i></p>	<p>Further extension RC drilling programmes will be planned. The broader Nanadie geological model will be used to identify mineralisation trends and identify areas along strike and down dip that can be targeted for drilling. Further, diamond drilling may be planned to aid structural interpretations and to allow more detailed mineralisation</p>



Criteria	JORC Code explanation	Commentary
	<i>future drilling areas, provided this information is not commercially sensitive.</i>	domain demarcation. This drill core will also provide additional core for bulk density characterisation. Metallurgical testing is planned utilising the half core samples from the five Cyprium core holes previously drilled and archived in Perth. Further studies may be required depending on the outcomes of the initial sighter metallurgical test work.