

Deep Drilling Extends High-Grade Copper-Gold Zones to +700m Depth at Nanadie

Outstanding assays from NANRCD005 extend the Nanadie system more than 500m below the current Mineral Resource

Highlights

- **Multiple wide, high-grade copper-gold intercepts** have been returned from the Company's step-down diamond 'tail', **NANRCD005**, at the **Nanadie Copper-Gold Project in WA**, confirming another **extraordinarily well mineralised drillhole** and extending the mineralisation more than 700m below surface.
- Total **combined intercept** (RC and diamond 'tail') of **722.3m @ 0.44% Cu, 0.13g/t Au** from the margin of granite (on the west side of host gabbro) to end of hole (**EOH**) (including all unmineralised intervals), **with significant new intercepts including:**
 - ❖ **79.9m @ 0.47% Cu, 0.19g/t Au** from 362.8m
 - ❖ **89.3m @ 0.64% Cu, 0.17g/t Au** from 504.7m incl. **16m @ 1.24% Cu, 0.27g/t Au** from 509m
 - ❖ **28m @ 1.31% Cu, 0.30g/t Au** from 630m
 - ❖ **19.4m @ 0.99% Cu, 0.27g/t Au** from 693m
 - ❖ **43.3m @ 0.91% Cu, 0.35g/t Au** from 761.7m incl. **10.3m @ 1.25% Cu, 0.41g/t Au** from 761.7m and **8m @ 1.49% Cu, 0.86g/t Au** from 794m.
- The high-grade zones in NANRCD005 are comparable to those previously reported in shallower drill hole **NANRCD004¹**, which returned **629.1m @ 0.5% Cu, 0.17g/t Au EOH from surface, with both holes comparable to those typically seen in globally significant copper systems.**
- NANRCD005 was drilled to extend Reverse Circulation (RC) hole NANRCD005, which had previously returned intercepts of up to **57m @ 0.60% Cu, 0.16g/t Au²**. The combined RC and diamond intercept in this hole **demonstrates the continuity of copper-gold mineralisation to more than 500m below the current Mineral Resource Estimate (MRE) boundary.**
- Copper-gold assays continue to **closely match previously reported zones of visible chalcopyrite (copper sulphide) mineralisation³**, providing confidence in all other diamond tails currently at the laboratory or in stages of being processed and sampled.
- **Drilling will accelerate** following the completion of the expanded camp and core processing facilities, with **multiple RC and diamond rigs expected to be operating through the balance of the year** expanding a mineralised system that is currently defined over at least **1.2km of strike** and approximately **100-200m in width**, remains open to the north and south, and **is completely open to depth.**



- The results from NANRCD005 further demonstrate the **clear potential to materially expand the current 40.4Mt MRE⁴ at Nanadie**.
- Assays are pending from a further **14 completed diamond holes** and over **20 RC holes** which combined with ongoing drilling will provide a **steady stream of results over the coming months** as Solstice continues to demonstrate the scale of the Nanadie system.
- Importantly, Nanadie sits on a granted Mining Lease in flat WA Goldfields terrain.

Solstice Minerals' Chief Executive Officer and Managing Director, Mr Nick Castleden, said:

"NANRCD005 is an extraordinary drillhole that marks another defining moment in the rapidly unfolding story at Nanadie. The combined 722.3m @ 0.44% Cu, 0.13g/t Au intercept – inclusive of all post-mineral dykes and low-grade zones – provides definitive evidence that the deposit will continue to deliver scale and grade way beyond the current MRE limits. Within that broad mineralised envelope, we are seeing multiple substantial higher-grade zones such as 28m @ 1.31% Cu, 0.3g/t Au and 43.3m @ 0.91% Cu, 0.35g/t Au – showing that grade as well as scale persist at depth.

"We now have strong drill-supported evidence that Nanadie is a rare, large-scale copper-gold system in an infrastructure-rich WA Goldfields setting with the potential to take Solstice beyond exploration. The results continue to reinforce our view that Nanadie is growing into a much larger copper-gold system than previously recognised.

"Importantly, the assays continue to correlate very closely with the zones of visible sulphide mineralisation identified during geological logging, which allows us to accelerate our work and plan extensive follow-up core drilling in advance of laboratory assays. NANRCD005 and the adjacent NANRCD004 are also beginning to define what appears to be an important higher-grade position towards the eastern margin of the host gabbro which can be incorporated into future MRE upgrades and appears to be strengthening at depth.

"This encourages us to keep chasing extensions well below existing drilling and also potentially up-plunge into the current MRE area. Our priority is to increase drilling density through this area and continue stepping down below the existing Resource, where the system remains completely open. Encouragingly, we are yet to drill a blank hole in the >1.2km long drillout.

"With a second RC rig due on site shortly, ongoing drilling across the broader system, and assays pending from a further 14 diamond tails and 20 RC holes, we have a substantial amount of news flow ahead of us. The host gabbro and copper sulphide mineralisation extends well beyond the limits of drilling, and we also see excellent opportunity for first drilling at the nearby Stark Prospect – short-hole RC drilling into unexplored strike positions – and testing of geophysical targets."

Nanadie Diamond Drilling Results

Solstice Minerals Limited (**Solstice** or the **Company**) is pleased to report wide, high-grade copper-gold intercepts from its deepest-yet diamond drillhole 'tail', **NANRCD005**, completed at the advanced 100%-owned **Nanadie Copper-Gold Project**, located northwest of Sandstone in WA's Goldfields.



NANRCD005 extended the Company's Phase 1 RC hole NANRC005 with a diamond tail drilled from 324.3m to a final depth of **840.6m**. The hole was drilled to follow-up strong visual sulphide mineralisation³ (and subsequent outstanding laboratory assay results¹) intersected in the shallower hole NANRCD004 (**Figure 1**).

Importantly, the tail intersected wide zones of mineralised and altered host gabbro and dolerite, before terminating in mafic rocks to the east. As reported previously, geological logging identified zones of **chalcopyrite mineralisation in multiple locations downhole**, predominantly occurring as disseminations, fabric-parallel veinlets and cross-cutting sulphide veins. Mineralised zones are often separated by later, post-mineral felsic and mafic dykes.

Assay results correspond closely to the logged sulphide intervals, with significant intercepts including:

- ❖ **79.9m @ 0.47% Cu, 0.19g/t Au** from 362.8m
- ❖ **89.3m @ 0.64% Cu, 0.17g/t Au** from 504.7m incl. **16m @ 1.24% Cu, 0.27g/t Au** from 509m
- ❖ **13.2m @ 0.84% Cu, 0.22g/t Au** from 610.6m
- ❖ **28m @ 1.31% Cu, 0.30g/t Au** from 630m
- ❖ **19.4m @ 0.99% Cu, 0.27g/t Au** from 693m
- ❖ **23m @ 0.76% Cu, 0.18g/t Au** from 733m
- ❖ **43.3m @ 0.91% Cu, 0.35g/t Au** from 761.7m incl. **10.3m @ 1.25% Cu, 0.41g/t Au** from 761.7m and **8m @ 1.49% Cu, 0.86g/t Au** from 794m.

The results are shown in cross-section in **Figure 1**, in plan view in **Figure 2**, and in long section view in **Figure 3**. Diamond tail details and significant intercepts are shown in **Table 1**, and all mineralised intervals above 0.1% copper are detailed in **Table 3**.

Combined RC and diamond assays confirm NANRCD005 as another extraordinarily mineralised drillhole in the Nanadie system, with a combined intercept (inclusive of late unmineralised dykes and sub-grade waste) of **722.3m @ 0.44% Cu, 0.13g/t Au**, extending from the margin of granite onlap (on the west side of host gabbro) to end of hole (EOH).

The combined intercept is comparable to the previously reported combined intercept of **629.1m @ 0.50% Cu, 0.17g/t Au** in shallower drill hole **NANRCD004¹** (**Figure 1**) and, together, establish a drill section **comparable to those seen in large-scale, global porphyry copper-gold systems**.

Importantly, Nanadie sits on a granted Mining Lease in flat terrain in Western Australia, in the infrastructure-rich WA Goldfields.

The assay results from NANRCD005 **extend the depth of the mineralised system more than 500m beyond the MRE boundary** and, when combined with NANRCD004, **provide conclusive evidence that this part of the deposit hosts multiple zones of wide high-grade mineralisation**, particularly within alteration and deformation zones along the eastern margin of the gabbro body. The eastern



margin is under-tested in places nearer to surface and offers potential to deliver previously unrecognised higher-grade material within the current MRE area.

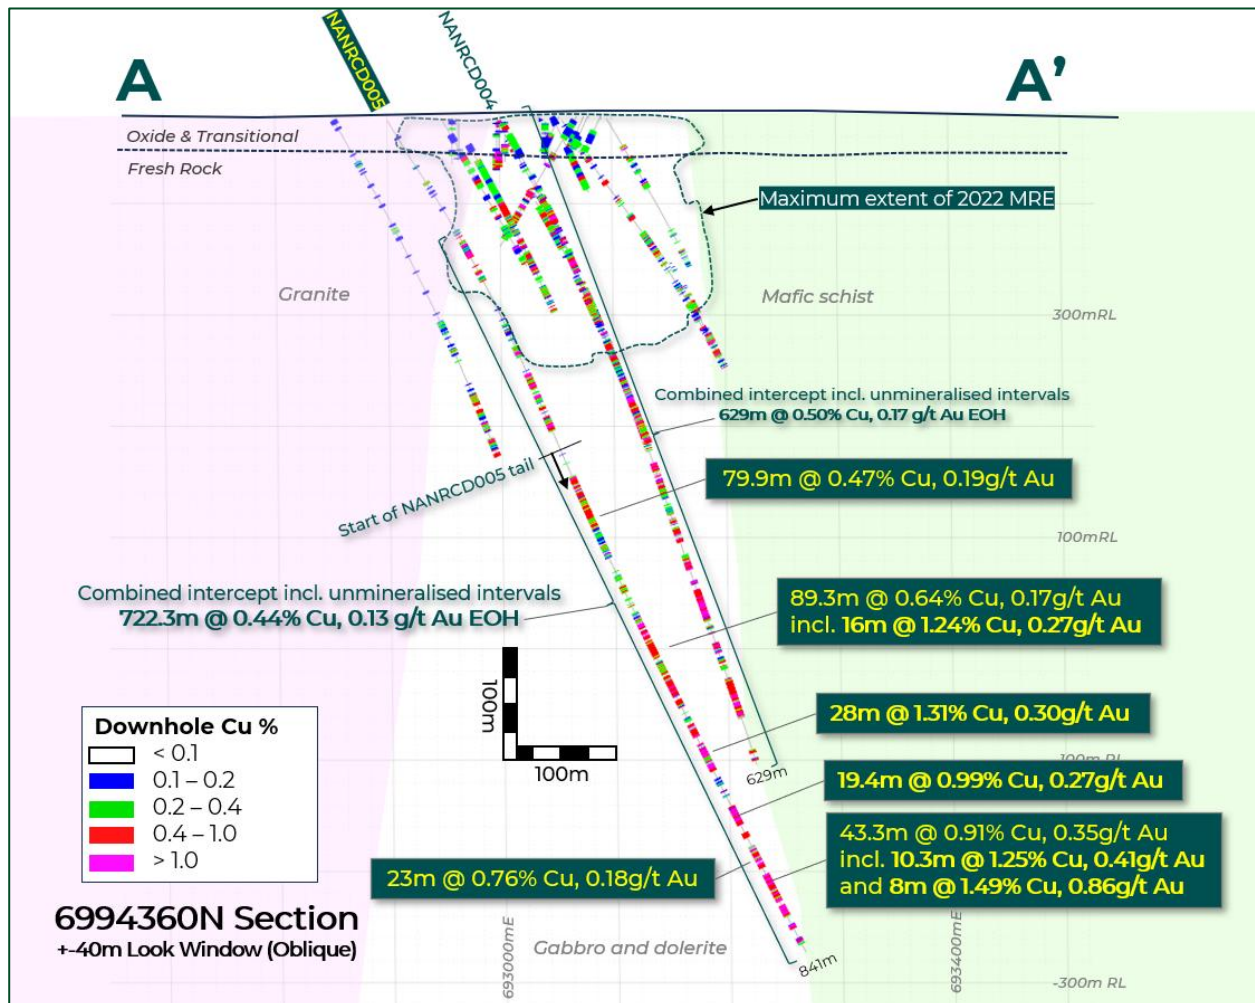


Figure 1. Nanadie Deposit cross-section 6994360N showing NANRCD005 assay results, simplified geology, and trace of earlier NANRDC004 diamond tail¹. Also shown Phase 1 RC² and historical drilling⁴, and the boundary of the 2022 MRE block model.

The close correlation between copper-gold assays and reported visible chalcopyrite (copper sulphide) mineralisation provides confidence in other diamond tails currently at the laboratory or in stages of being processed and sampled, allowing the Company to accelerate drilling and carry out systematic follow-up core drilling in advance of laboratory assays.

Drilling is set to accelerate following the completion of expanded camp and core processing facilities, with Solstice aiming to have multiple RC and diamond rigs operating through the balance of the year. The Company intends to continue exploring the dimensions and plunge components of the Nanadie system through targeted follow-up RC and diamond drillholes, as well as testing the potential for higher-grade zones to extend upward into under-explored portions of the eastern gabbro within the current MRE boundary.

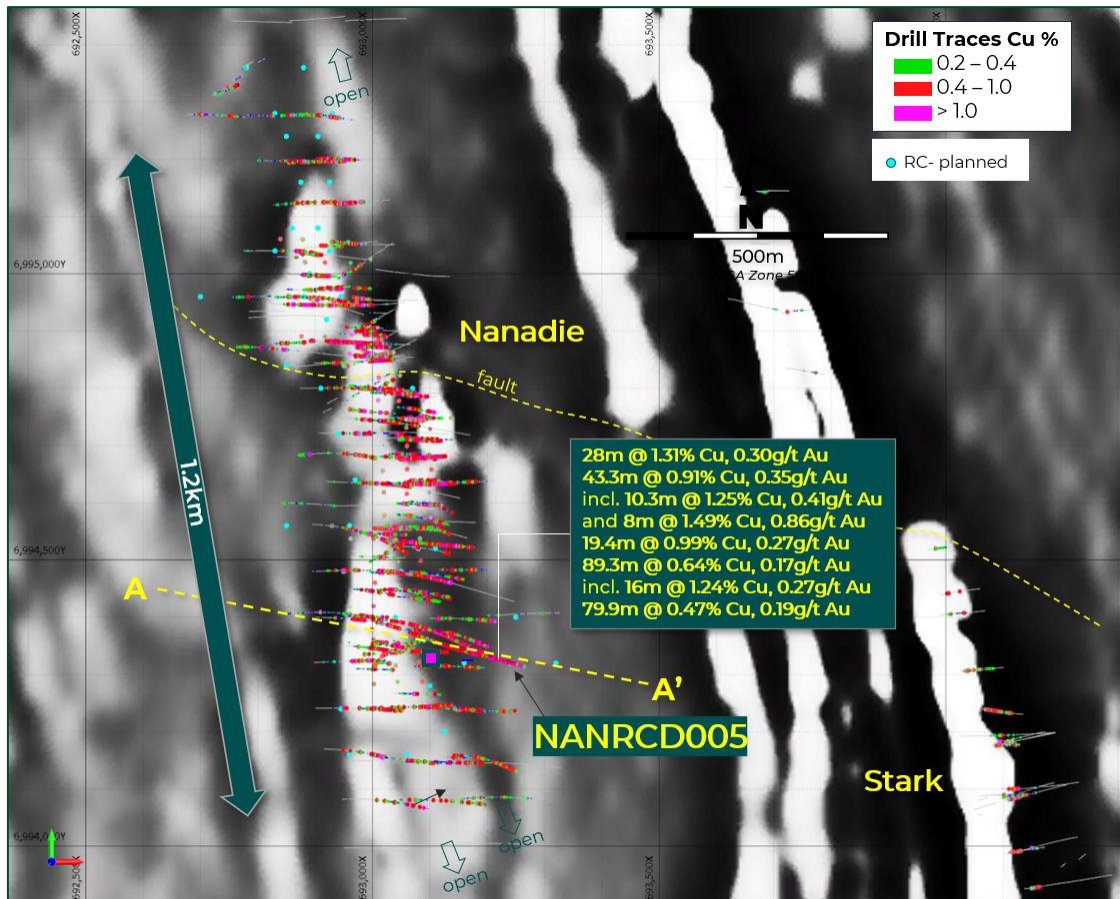


Figure 2. Nanadie Deposit aeromagnetic imagery and downhole copper values in previous drilling^{1,2,4,5} projected to surface, showing projected copper values in NANRCD005 and significant intercepts. Pending RC drillholes shown as light blue dots.

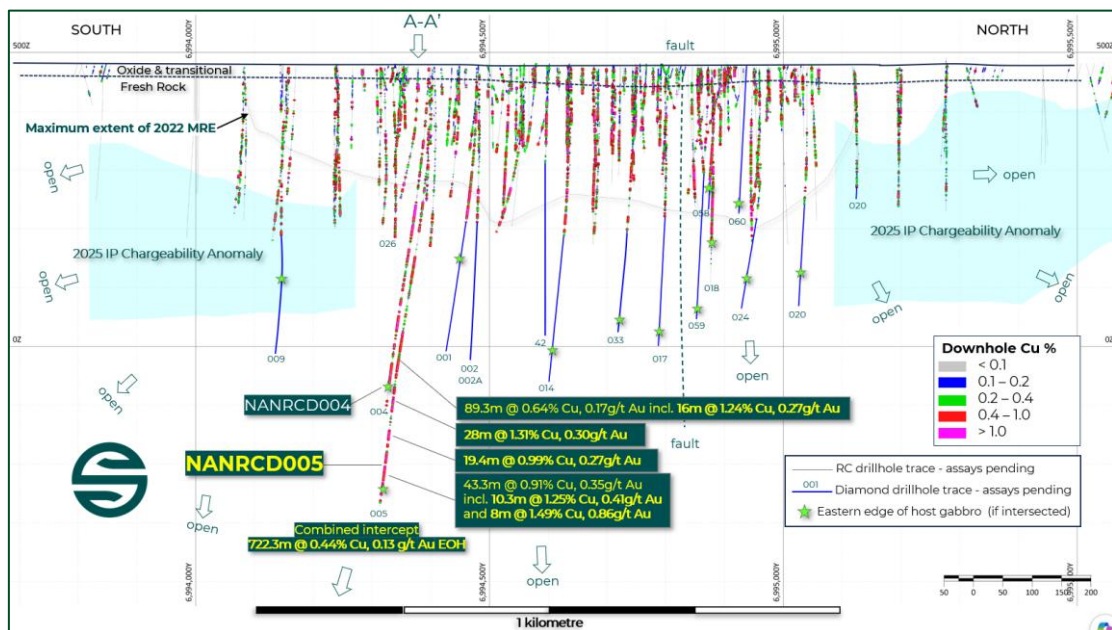


Figure 3. Nanadie long section looking west, showing all diamond drillholes labelled, high grade intercepts in NANRCD005 and copper values in all prior drilling^{1,2,4,5}, IP chargeability anomalies⁶, and location of cross-sections A-A' relative to the maximum extent of the 2022 MRE block model.



Photo 1. Core tray photos of altered gabbro from 792.8m to 801.5m (8.7m), with chalcopyrite (cpy) sulphide zones labelled alongside copper assays and gold assays where greater than 1g/t Au. These trays are part of a 43.3m zone that has subsequently returned an intercept of 0.91% Cu and 0.35g/t Au from 761.7m.

Table 1. NANRCD005 significant intercepts (~10m downhole length @ >0.40% Cu).

Hole ID	Prospect	Type	Easting	Northing	Dip	Azim	Core	Depth	Significant Intercepts	From
NANRCD005	Nanadie	RC/DD	692900	6994400	-60	90	516.1	840.1	79.9m @ 0.47% Cu, 0.19g/t Au	362.8
									89.3m @ 0.64% Cu, 0.17g/t Au	504.7
								incl.	16m @ 1.24% Cu, 0.27g/t Au	509.0
									13.2m @ 0.84% Cu, 0.22g/t Au	610.6
									28m @ 1.31% Cu, 0.30g/t Au	630.0
									19.4m @ 0.99% Cu, 0.27g/t Au	693.0
									23m @ 0.76% Cu, 0.18g/t Au	733.0
									43.3m @ 0.91% Cu, 0.35g/t Au	761.7
								incl.	10.3m @ 1.25% Cu, 0.41g/t Au	761.7
								and incl.	8m @ 1.49% Cu, 0.86g/t Au	794.0

Significant intercepts in Table 1 are typically reported for >10m intervals at a grade of >0.4% Cu, on the basis of a 0.2% Cu and 0.1g/t Au lower cut-off and allowing for a maximum 5m internal dilution.



Diamond Drilling Update

Diamond drilling continues to extend RC pre-collar holes along the length of the deposit, primarily to test the full geometry of the host gabbro package beyond the limits of current drilling and MRE boundary and, importantly, systematically explore the strongly mineralised eastern side of the host gabbro beyond RC operating depths.

Increased confidence that the Company's geological observations will be supported in due course by laboratory assays is allowing proactive drilling of follow-up holes on the basis of new observations, and the Company intends to add additional diamond capability as drilling progresses to systematic testing of step-down targets.

Assays are pending for a further 14 completed tails (**Figure 2** and **Figure 3**), additional holes are in stages of on-site processing, or in progress, or planned once suitable RC pre-collars are in place.

A steady stream of laboratory results can be expected over coming months.

RC Drilling Update

The current RC program has been further extended to beyond 15,000m RC drilling and is set to accelerate with the arrival of a second drill rig in coming days. Drilling comprises 'pre-collar' holes designated for the next diamond tails, step-out exploration tests, and Mineral Resource delineation drilling focussing on near-surface higher grade targets along the system. Current planned drillholes are shown in **Figure 2**.

Observed geology in RC drilling is broadly consistent with that seen in the Company's drilling to date and continues to outline a much larger copper-gold system than previously recognised. An improved understanding of the geological setting and geometry of higher-grade zones may enhance the grade profile of any future Mineral Resource Estimate updates.

Over 20 RC holes are at the laboratory, and drilling, processing and dispatch of RC samples is ongoing. Results are expected to be reported in batches over the coming months.

In due course the program is expected to include first drilling at the nearby **Stark Prospect (Figure 2)** and step into unexplored strike positions via short-hole RC drilling, as well as targeted testing of any emerging geophysical targets.

Nanadie Results Summary

Results from Solstice's continuing RC and diamond drilling have clearly **extended mineralisation in multiple directions well beyond the current MRE boundary** and are demonstrating clear potential to expand an already significant deposit into a **standout large-volume copper-gold system in WA's premier Goldfields mining jurisdiction**.



With \$45 million cash and no debt, Solstice is well positioned to continue growing Nanadie through drilling, IP and downhole EM geophysical techniques, and applying an updated geological model that has opened multiple, additional growth targets at the nearby **Stark Prospect** and exploration corridors extending north from Nanadie and Stark beneath shallow transported cover.

About the Nanadie Copper Gold Deposit

Nanadie is situated within a granted Mining Lease approximately 100km northwest of Sandstone (**Figure 4**) and includes an existing Inferred MRE of **40.4 million tonnes at 0.4% copper and 0.1g/t gold**, containing **162,000 tonnes of copper** and **130,000 ounces of gold**⁴ (**Table 2**). The deposit represents a substantial base of strategic metals with strong future demand outlooks.

Historical drilling below a shallow soil and sand cover and weathering profile has defined a wide, gabbro-hosted near-surface accumulation of disseminated and remobilised sulphide veinlet and foliation-controlled chalcopyrite (+/- pyrrhotite and pyrite) mineralisation over 150m wide and 1.2 km long.

Approximately 90% of the MRE is fresh rock mineralisation below 40m depth. Significant zones of >1% Cu occur where chalcopyrite vein density and host-rock alteration increase, and increased sulphide veining is typically accompanied by raised gold values. No deleterious sulphide species are present.

Table 2: Nanadie Well 2012 JORC Mineral Resource Estimate⁴.

Resource Category	Material Type	Volume	Tonnes	Cu Grade (%)	Cu Metal (t)	Au Grade (g/t)	Au Metal (oz)	Ag Grade (g/t)	Ag Metal (oz)
Inferred	Oxide	1,300,000	3,500,000	0.44	16,000	0.12	13,000	0.70	74,000
	Transitional	200,000	600,000	0.45	3,000	0.12	2,000	1.50	31,000
	Fresh	11,700,000	36,300,000	0.39	143,000	0.10	115,000	1.10	1,259,000
Total		13,200,000	40,400,000	0.4	162,000	0.10	130,000	1.00	1,364,000

Note: Differences in sum totals of tonnages and grades may occur due to rounding cut-off at 0.25% Cu, reported grades and tonnages for all metals are estimated top-cut grades and tonnages.



Photo 2. Typical RC drill samples (NANRC001)¹ at Nanadie. Note the limited oxidation profile below shallow sandy soils.

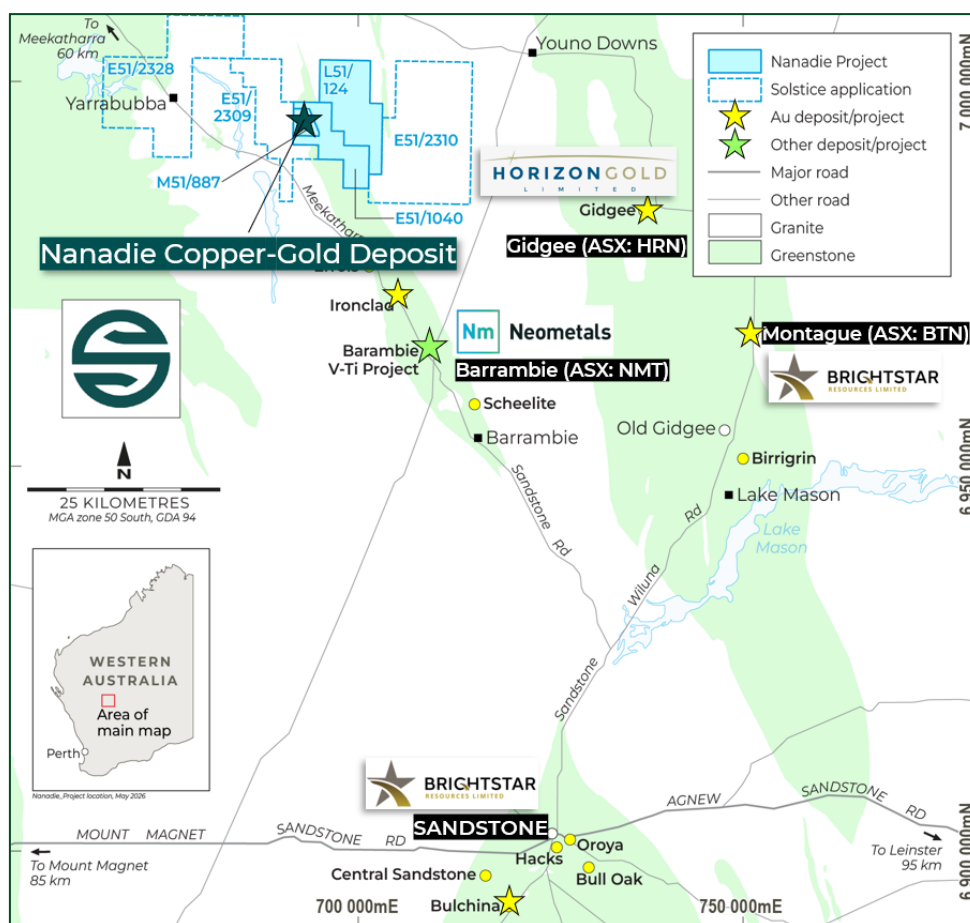


Figure 4: Location of the Nanadie Copper-Gold Project tenements NW of Sandstone



References

1. Refer to ASX: SLS 26 June 2026 'Exceptional First Core Results at Nanadie Copper-Gold Project WA'.
2. For all Phase 1 RC drilling at Nanadie Copper-Gold Project refer to ASX: SLS 3 February 2026 'Outstanding High-Grade Cu-Au Intercepts at Nanadie', 23 February 2026 'Strong Copper-Gold Intercepts Continue at Nanadie Project', 3 March 2026 'New High-Grade Zone Emerges at Nanadie Copper-Gold Project', and 17 March 2026 'Significant Copper-Gold Growth Potential at Nanadie Project'.
3. Refer to ASX: SLS 27 April 2026 'Strong Start to Diamond Drilling at Nanadie Copper-Gold Project, WA', and ASX: SLS 11 May 2026 "Strong Zones in Follow-up Diamond Drillhole at Nanadie".
4. Refer to ASX: SLS 5 February 2025 'Solstice Secures Strategic Copper Exposure'.
5. For Phase 2 RC drilling results to date refer to ASX: SLS 12 June 2026 'Step-out Drilling Extends Nanadie Copper-Gold Mineralisation', 3 August 2026 'Wide +1% Cu Intercepts Continue at Nanadie Copper Gold Project', and 20 August 2026 'More Wide Intercepts Further Extend Nanadie Copper-Gold Deposit'.
6. Refer to ASX: SLS 8 August 2025 'IP Survey Points to Step-Out Drill Targets at Nanadie Copper Gold Project'.

All exploration releases are available on the Company's website at:

<https://solsticeminerals.com.au/investor-centre/asx-announcements>.

This announcement has been authorised for release by the Board.

For further information please contact:
Nick Castleden - CEO & Managing Director
T: +61 (8) 9200 1838

Media inquiries:
Nicholas Read – Read Corporate
T: +61 (8) 9388 1474



Table 3. All individual analytical results above 0.10% Cu

Hole ID	FROM (m)	TO (m)	Cu (%)	Au (g/t)	Ag (g/t)
NANRCD005	341.2	342.0	0.13	0.03	0.22
NANRCD005	350.0	351.0	0.24	0.09	0.54
NANRCD005	362.9	364.0	0.21	0.05	0.34
NANRCD005	364.0	365.0	0.49	0.59	0.78
NANRCD005	365.0	366.0	1.80	2.00	3.17
NANRCD005	366.0	367.0	0.76	0.99	1.39
NANRCD005	367.0	368.0	0.52	0.09	0.86
NANRCD005	368.0	369.0	0.41	0.11	0.66
NANRCD005	369.0	370.0	0.99	0.26	1.63
NANRCD005	370.0	371.0	0.57	0.11	0.96
NANRCD005	371.0	372.0	0.31	0.09	0.5
NANRCD005	372.0	373.0	1.70	0.26	2.69
NANRCD005	373.0	374.0	0.91	1.69	1.59
NANRCD005	374.0	375.0	0.63	0.15	1.01
NANRCD005	375.0	376.0	0.22	0.07	0.37
NANRCD005	376.0	377.0	1.10	0.29	1.7
NANRCD005	377.0	378.0	1.41	0.86	2.5
NANRCD005	378.0	378.9	0.31	0.09	0.5
NANRCD005	378.9	379.3	0.48	0.19	0.8
NANRCD005	379.3	380.0	0.50	0.15	0.84
NANRCD005	380.0	381.0	0.65	0.17	1.13
NANRCD005	381.0	382.0	0.48	0.18	0.72
NANRCD005	382.0	383.0	0.60	0.17	1
NANRCD005	383.0	384.0	0.19	0.07	0.31
NANRCD005	384.0	385.0	0.48	0.14	0.8
NANRCD005	385.0	386.0	0.28	0.12	0.45
NANRCD005	386.0	387.0	0.55	0.13	0.88
NANRCD005	387.0	388.0	0.50	0.17	0.8
NANRCD005	388.0	389.0	0.34	0.13	0.57
NANRCD005	389.0	390.0	0.35	0.14	0.62
NANRCD005	390.0	391.0	0.98	0.19	1.61
NANRCD005	391.0	392.0	0.39	0.10	0.64
NANRCD005	392.0	393.0	0.93	0.23	1.52
NANRCD005	393.0	394.0	0.41	0.12	0.7
NANRCD005	394.0	395.0	0.48	0.14	0.79
NANRCD005	395.0	396.0	0.23	0.08	0.38
NANRCD005	396.0	397.0	0.60	0.14	1.01
NANRCD005	397.0	398.0	0.55	0.25	0.93
NANRCD005	398.0	399.0	0.63	0.10	1.06
NANRCD005	399.0	400.0	0.64	0.24	1
NANRCD005	400.0	401.0	0.63	0.18	1.03
NANRCD005	401.0	402.0	0.55	0.12	0.94
NANRCD005	402.0	403.0	0.55	0.34	0.99
NANRCD005	403.0	404.0	0.76	0.21	1.33
NANRCD005	404.0	405.0	0.43	0.12	0.73
NANRCD005	405.0	406.0	0.34	0.14	0.56
NANRCD005	406.0	407.0	0.33	0.10	0.59
NANRCD005	407.0	408.0	0.37	0.14	0.65
NANRCD005	408.0	409.0	0.42	0.14	0.74
NANRCD005	409.0	410.0	0.32	0.07	0.57
NANRCD005	410.0	411.0	0.45	0.10	0.83
NANRCD005	411.0	412.0	0.41	0.05	0.78
NANRCD005	412.0	413.0	0.50	0.06	0.95
NANRCD005	413.0	414.0	0.29	0.09	0.53
NANRCD005	414.0	415.0	0.66	0.22	1.23
NANRCD005	415.0	416.0	0.14	0.05	0.26
NANRCD005	416.0	417.0	0.16	0.05	0.26
NANRCD005	417.0	418.0	0.31	0.14	0.54

Hole ID	FROM (m)	TO (m)	Cu (%)	Au (g/t)	Ag (g/t)
NANRCD005	419.0	420.0	0.12	0.04	0.2
NANRCD005	420.0	421.0	0.32	0.08	0.56
NANRCD005	421.0	422.0	0.26	0.08	0.45
NANRCD005	422.0	423.0	0.32	0.07	0.62
NANRCD005	423.0	424.0	0.23	0.09	0.44
NANRCD005	424.0	425.0	0.13	0.05	0.23
NANRCD005	425.0	426.0	0.17	0.05	0.3
NANRCD005	426.0	427.0	0.14	0.04	0.25
NANRCD005	427.0	428.0	0.36	0.13	0.66
NANRCD005	428.0	429.0	0.15	0.05	0.27
NANRCD005	429.0	430.0	0.12	0.08	0.22
NANRCD005	431.0	432.0	0.41	0.22	0.74
NANRCD005	432.0	433.0	0.25	0.09	0.45
NANRCD005	433.0	434.0	0.21	0.08	0.38
NANRCD005	434.0	435.0	0.49	0.19	0.95
NANRCD005	435.0	436.0	0.25	0.09	0.49
NANRCD005	436.0	437.0	0.35	0.10	0.71
NANRCD005	437.0	438.0	0.17	0.03	0.38
NANRCD005	439.0	440.0	0.19	0.08	0.4
NANRCD005	440.0	441.0	1.26	0.14	3.07
NANRCD005	441.0	442.0	0.34	0.06	0.74
NANRCD005	442.0	442.8	0.27	0.03	0.55
NANRCD005	442.8	444.1	0.13	0.03	0.3
NANRCD005	457.0	458.2	0.35	0.23	0.82
NANRCD005	461.3	462.0	0.18	0.08	0.47
NANRCD005	462.0	463.0	0.32	0.12	0.8
NANRCD005	463.0	463.7	0.32	0.19	0.76
NANRCD005	463.7	464.0	0.46	0.73	1.07
NANRCD005	464.0	465.0	0.38	0.08	0.87
NANRCD005	465.0	466.0	0.36	0.15	0.79
NANRCD005	466.0	466.6	0.33	0.06	0.75
NANRCD005	471.1	472.0	0.29	0.09	0.72
NANRCD005	472.0	473.0	0.85	0.15	1.91
NANRCD005	473.0	474.0	0.58	0.11	1.24
NANRCD005	474.0	475.0	0.26	0.11	0.53
NANRCD005	475.0	476.0	0.25	0.07	0.53
NANRCD005	476.0	476.5	0.33	0.13	0.66
NANRCD005	476.5	477.0	0.78	0.15	1.67
NANRCD005	477.0	478.0	0.89	0.23	1.98
NANRCD005	478.0	478.8	0.30	0.10	0.59
NANRCD005	484.0	485.0	0.34	0.09	0.63
NANRCD005	485.0	486.1	0.28	0.10	0.51
NANRCD005	489.0	490.0	0.30	0.02	0.61
NANRCD005	491.0	492.0	0.61	0.17	1.32
NANRCD005	492.0	492.6	0.35	0.14	0.7
NANRCD005	498.0	499.0	0.26	0.08	0.54
NANRCD005	499.0	500.0	0.31	0.08	0.68
NANRCD005	500.0	501.0	0.11	0.02	0.32
NANRCD005	502.0	503.0	0.14	0.04	0.31
NANRCD005	503.0	504.0	0.14	0.05	0.26
NANRCD005	504.7	506.0	0.63	0.14	1.3
NANRCD005	506.0	507.0	0.35	0.09	0.74
NANRCD005	507.0	508.0	0.36	0.09	0.79
NANRCD005	508.0	508.4	0.70	0.24	1.41
NANRCD005	509.0	510.0	1.14	0.19	2.47
NANRCD005	510.0	511.0	1.83	0.16	4.32
NANRCD005	511.0	512.0	5.86	0.26	11.88
NANRCD005	512.0	512.9	2.36	1.90	5.15



Hole ID	FROM (m)	TO (m)	Cu (%)	Au (g/t)	Ag (g/t)
NANRCD005	512.9	514.0	0.77	0.18	1.63
NANRCD005	514.0	514.6	0.94	0.18	2.01
NANRCD005	516.0	516.7	0.13	0.04	0.28
NANRCD005	516.7	518.0	0.67	0.15	1.54
NANRCD005	518.0	519.0	0.84	0.15	2.03
NANRCD005	519.0	520.0	1.04	0.37	2.38
NANRCD005	520.0	520.5	0.53	0.21	1.2
NANRCD005	521.0	522.0	2.03	0.15	4.57
NANRCD005	522.0	523.0	0.81	0.30	1.73
NANRCD005	523.0	525.0	0.74	0.17	1.61
NANRCD005	526.3	527.0	0.55	0.14	1.13
NANRCD005	527.0	528.0	0.56	0.11	1.2
NANRCD005	528.0	529.0	0.37	0.10	0.75
NANRCD005	529.0	530.0	0.66	0.15	1.42
NANRCD005	530.0	531.0	0.75	0.64	1.53
NANRCD005	531.0	532.0	0.64	0.18	1.37
NANRCD005	532.0	533.0	1.00	0.15	2.06
NANRCD005	533.0	533.7	0.76	0.10	1.58
NANRCD005	533.7	535.0	0.43	0.25	0.91
NANRCD005	535.0	536.0	0.82	0.28	1.83
NANRCD005	536.0	537.0	0.83	0.24	1.76
NANRCD005	537.0	538.0	0.49	0.13	0.95
NANRCD005	538.0	539.0	0.63	0.30	1.31
NANRCD005	539.0	540.0	0.55	0.18	1.05
NANRCD005	540.0	541.0	0.42	0.11	0.74
NANRCD005	541.0	542.0	0.51	0.07	1.06
NANRCD005	542.0	542.7	0.35	0.08	0.75
NANRCD005	542.7	543.0	0.53	0.09	1.09
NANRCD005	543.0	544.1	0.45	0.11	0.89
NANRCD005	546.9	548.0	0.39	0.15	0.76
NANRCD005	548.0	549.0	0.16	0.05	0.34
NANRCD005	549.0	550.0	0.96	0.23	2.02
NANRCD005	550.0	551.0	0.36	0.12	0.72
NANRCD005	551.0	552.0	0.29	0.11	0.58
NANRCD005	552.0	553.0	0.55	0.17	1.05
NANRCD005	553.0	554.0	0.26	0.07	0.56
NANRCD005	554.0	555.0	0.34	0.22	0.77
NANRCD005	555.0	556.0	0.56	0.16	1.2
NANRCD005	556.0	557.0	0.25	0.06	0.55
NANRCD005	557.0	558.0	0.38	0.15	0.89
NANRCD005	558.0	559.0	0.89	0.12	2.52
NANRCD005	559.0	560.0	0.51	0.18	1.29
NANRCD005	560.0	561.0	0.21	0.06	0.45
NANRCD005	562.0	563.0	0.46	0.12	0.81
NANRCD005	563.0	564.0	0.42	0.11	0.81
NANRCD005	564.0	565.0	0.44	0.12	0.73
NANRCD005	565.0	566.0	0.34	0.08	0.61
NANRCD005	566.0	567.0	1.03	0.31	1.77
NANRCD005	567.0	568.0	0.73	0.17	1.18
NANRCD005	568.0	569.0	0.51	0.17	0.86
NANRCD005	569.0	570.0	0.42	0.10	0.71
NANRCD005	570.0	571.0	0.91	0.13	1.57
NANRCD005	571.0	572.0	0.81	0.14	1.35
NANRCD005	572.0	573.0	0.77	0.18	1.32
NANRCD005	573.0	574.0	1.37	0.18	2.38
NANRCD005	574.0	575.0	0.49	0.13	0.78
NANRCD005	575.0	576.0	0.86	0.34	1.42
NANRCD005	576.0	577.0	0.55	0.15	0.95
NANRCD005	577.0	578.0	1.03	0.26	1.72
NANRCD005	578.0	579.0	0.56	0.13	0.91
NANRCD005	579.0	580.0	0.43	0.10	0.7
NANRCD005	580.0	581.0	0.51	0.16	0.81
NANRCD005	581.0	582.0	0.54	0.07	0.89

Hole ID	FROM (m)	TO (m)	Cu (%)	Au (g/t)	Ag (g/t)
NANRCD005	582.0	583.0	0.18	0.17	0.24
NANRCD005	585.6	587.0	0.94	0.21	1.6
NANRCD005	587.0	588.0	0.72	0.34	1.1
NANRCD005	588.0	589.0	0.84	0.39	1.33
NANRCD005	589.0	590.0	0.64	0.11	0.97
NANRCD005	590.0	591.0	0.71	0.20	1.28
NANRCD005	591.0	592.0	0.24	0.04	0.37
NANRCD005	592.0	593.0	0.15	0.11	0.19
NANRCD005	593.0	594.0	0.59	0.17	0.9
NANRCD005	599.1	600.0	0.23	0.06	0.2
NANRCD005	604.0	605.3	0.10	0.03	0.21
NANRCD005	605.3	606.0	0.38	0.12	0.62
NANRCD005	606.0	607.0	0.37	0.14	0.56
NANRCD005	607.0	608.0	0.29	0.09	0.44
NANRCD005	610.6	612.0	0.42	0.12	0.66
NANRCD005	612.0	613.0	0.42	0.30	0.83
NANRCD005	613.0	614.0	1.97	0.53	3.59
NANRCD005	614.0	615.0	0.31	0.08	0.56
NANRCD005	615.0	616.0	1.30	0.23	2.26
NANRCD005	616.0	617.0	0.71	0.25	1.23
NANRCD005	617.0	618.0	0.84	0.22	1.43
NANRCD005	618.0	619.0	0.65	0.18	1.15
NANRCD005	619.0	620.0	0.66	0.24	1.14
NANRCD005	620.0	621.0	0.80	0.19	1.35
NANRCD005	621.0	622.0	0.71	0.14	1.26
NANRCD005	622.0	623.0	1.38	0.24	2.49
NANRCD005	623.0	623.8	0.91	0.18	1.57
NANRCD005	630.0	631.0	0.84	0.27	1.51
NANRCD005	631.0	632.0	7.31	1.32	13.25
NANRCD005	632.0	632.4	0.12	0.01	0.17
NANRCD005	633.2	634.0	0.22	0.04	0.37
NANRCD005	634.0	635.0	1.64	1.44	3.53
NANRCD005	635.0	635.6	0.70	0.30	1.3
NANRCD005	635.6	636.0	0.14	0.04	0.28
NANRCD005	636.0	637.0	0.44	0.09	0.78
NANRCD005	637.0	638.0	4.59	0.70	9.74
NANRCD005	638.0	639.0	1.23	0.28	2.69
NANRCD005	639.0	640.0	0.68	0.20	1.9
NANRCD005	640.0	641.0	1.40	0.08	4.09
NANRCD005	641.0	642.0	1.76	0.26	6.08
NANRCD005	642.0	643.0	1.53	0.24	6.8
NANRCD005	643.0	644.0	0.80	0.25	4.11
NANRCD005	644.0	645.0	0.29	0.11	1.03
NANRCD005	645.0	646.0	0.28	0.09	0.98
NANRCD005	646.0	647.0	0.24	0.08	0.63
NANRCD005	647.0	648.0	0.75	0.19	1.62
NANRCD005	648.0	649.0	1.61	0.32	3.6
NANRCD005	649.0	650.0	0.33	0.16	0.63
NANRCD005	650.0	651.0	1.16	0.28	2.3
NANRCD005	651.0	652.0	1.71	0.41	3.52
NANRCD005	652.0	653.0	1.45	0.21	2.91
NANRCD005	653.0	654.0	1.57	0.50	3.15
NANRCD005	654.0	655.0	2.23	0.39	4.46
NANRCD005	655.0	656.0	0.94	0.11	1.78
NANRCD005	656.0	657.0	0.40	0.09	0.81
NANRCD005	657.0	658.0	0.72	0.17	1.46
NANRCD005	665.0	666.0	0.12	0.07	0.29
NANRCD005	666.0	667.0	0.11	0.03	0.22
NANRCD005	668.0	669.0	0.17	0.04	0.28
NANRCD005	669.0	670.0	0.17	0.03	0.33
NANRCD005	670.0	671.0	0.36	0.16	0.57
NANRCD005	671.0	672.0	0.16	0.04	0.27
NANRCD005	672.0	672.4	0.29	0.13	0.49



Hole ID	FROM (m)	TO (m)	Cu (%)	Au (g/t)	Ag (g/t)
NANRCD005	677.4	678.0	0.68	0.09	1.15
NANRCD005	678.0	679.0	0.11	0.05	0.18
NANRCD005	682.0	683.0	0.14	0.04	0.34
NANRCD005	683.0	684.0	0.25	0.09	0.66
NANRCD005	693.0	694.0	0.88	0.54	1.95
NANRCD005	694.0	695.0	0.50	0.09	0.86
NANRCD005	695.0	696.0	0.19	0.04	0.33
NANRCD005	696.0	697.0	2.43	0.09	4.7
NANRCD005	697.0	698.0	1.31	0.17	2.58
NANRCD005	698.0	699.0	0.59	0.17	1.04
NANRCD005	699.0	700.0	1.03	0.18	1.94
NANRCD005	700.0	701.0	1.19	0.26	2.14
NANRCD005	701.0	702.0	0.74	0.25	1.29
NANRCD005	702.0	703.0	1.04	0.35	1.99
NANRCD005	703.0	704.0	0.84	0.32	1.62
NANRCD005	704.0	705.0	0.71	0.38	1.22
NANRCD005	705.0	706.0	1.20	0.28	2.23
NANRCD005	706.0	707.0	1.04	0.50	2.15
NANRCD005	707.0	708.0	1.44	0.41	2.7
NANRCD005	708.0	709.0	0.72	0.28	1.42
NANRCD005	709.0	710.0	0.89	0.35	1.62
NANRCD005	710.0	711.0	1.00	0.26	1.69
NANRCD005	711.0	712.0	0.95	0.28	1.74
NANRCD005	712.0	712.4	1.14	0.27	2.13
NANRCD005	719.7	721.0	0.71	0.22	0.97
NANRCD005	721.0	722.0	0.69	0.19	0.94
NANRCD005	722.0	723.0	0.58	0.13	0.78
NANRCD005	723.0	724.0	0.92	0.27	1.24
NANRCD005	724.0	725.3	0.71	0.15	0.96
NANRCD005	733.0	734.1	0.39	0.25	0.59
NANRCD005	734.1	734.9	1.06	0.14	1.7
NANRCD005	734.9	736.1	0.32	0.03	0.45
NANRCD005	736.1	737.0	1.18	0.14	1.69
NANRCD005	737.0	738.0	0.67	0.09	0.8
NANRCD005	738.0	739.0	1.04	0.17	1.26
NANRCD005	739.0	740.0	0.40	0.12	0.61
NANRCD005	740.0	741.0	0.85	0.20	0.99
NANRCD005	741.0	742.0	0.77	0.14	0.87
NANRCD005	742.0	743.0	0.50	0.13	0.59
NANRCD005	743.0	744.0	0.60	0.29	0.64
NANRCD005	744.0	745.0	1.54	0.08	1.82
NANRCD005	745.0	746.0	0.25	0.06	0.28
NANRCD005	746.0	747.0	0.44	0.24	0.52
NANRCD005	747.0	748.0	1.09	0.22	1.27
NANRCD005	748.0	749.0	1.30	0.27	1.45
NANRCD005	750.0	751.0	1.01	0.43	1.12
NANRCD005	751.0	752.0	1.39	0.30	1.61
NANRCD005	752.0	753.0	0.98	0.24	1.17
NANRCD005	753.0	754.0	0.75	0.33	0.82
NANRCD005	754.0	755.0	0.41	0.09	0.46
NANRCD005	755.0	756.0	0.80	0.17	0.84
NANRCD005	761.7	763.0	1.06	0.22	1.65
NANRCD005	763.0	764.0	2.44	1.07	4.39
NANRCD005	764.0	765.0	0.81	1.05	1.25
NANRCD005	765.0	766.0	0.91	0.20	1.42
NANRCD005	766.0	767.0	1.21	0.22	1.76

Hole ID	FROM (m)	TO (m)	Cu (%)	Au (g/t)	Ag (g/t)
NANRCD005	767.0	768.0	1.50	0.34	2.3
NANRCD005	768.0	769.0	0.80	0.18	1.23
NANRCD005	769.0	770.0	0.78	0.18	1.15
NANRCD005	770.0	771.0	2.00	0.58	3.24
NANRCD005	771.0	772.0	1.07	0.14	1.64
NANRCD005	772.0	773.0	0.71	0.16	1.09
NANRCD005	773.0	774.0	0.41	0.14	0.61
NANRCD005	774.0	775.0	0.58	0.14	0.86
NANRCD005	775.0	776.0	0.82	0.18	1.22
NANRCD005	776.0	777.0	0.62	0.20	0.91
NANRCD005	777.0	778.0	1.48	0.22	2.5
NANRCD005	778.0	779.0	0.28	0.08	0.42
NANRCD005	779.0	780.0	0.49	0.23	0.74
NANRCD005	780.0	781.0	0.56	0.10	0.84
NANRCD005	781.0	782.0	1.16	0.29	1.69
NANRCD005	782.0	783.0	0.59	0.39	0.92
NANRCD005	783.0	784.0	0.69	0.19	0.98
NANRCD005	784.0	785.0	0.84	0.21	1.28
NANRCD005	785.0	786.0	0.39	0.17	0.57
NANRCD005	786.0	787.0	0.62	0.23	0.93
NANRCD005	787.0	788.0	1.22	0.36	1.72
NANRCD005	788.0	789.0	1.03	0.20	1.49
NANRCD005	789.0	789.8	0.48	0.14	0.73
NANRCD005	793.0	794.0	0.47	0.14	0.79
NANRCD005	794.0	795.0	3.86	1.46	6.17
NANRCD005	795.0	796.0	1.11	0.21	1.69
NANRCD005	796.0	797.0	1.93	2.97	4.79
NANRCD005	797.0	798.0	0.73	0.29	1.2
NANRCD005	798.0	799.0	1.34	0.27	2.17
NANRCD005	799.0	800.0	0.59	0.18	0.9
NANRCD005	800.0	801.0	1.31	0.26	2.1
NANRCD005	801.0	802.0	1.08	1.23	1.67
NANRCD005	802.0	803.0	0.44	0.11	0.66
NANRCD005	803.0	804.0	0.62	0.25	0.95
NANRCD005	804.0	805.0	0.35	0.10	0.51
NANRCD005	812.0	813.0	0.11	0.04	0.2
NANRCD005	813.0	814.0	1.21	0.33	2.36
NANRCD005	814.0	815.0	1.49	0.20	2.88
NANRCD005	815.0	816.0	0.42	0.21	0.82
NANRCD005	816.0	817.0	0.86	0.24	1.69
NANRCD005	817.0	817.5	2.34	0.40	4.83
NANRCD005	826.0	827.0	0.18	0.04	0.4
NANRCD005	827.0	828.0	0.91	0.26	2.19
NANRCD005	828.0	829.0	0.13	0.02	0.28
NANRCD005	829.0	830.0	0.96	0.67	2.27
NANRCD005	830.0	831.0	1.45	0.33	3.46
NANRCD005	831.0	832.0	0.38	0.08	0.98
NANRCD005	832.0	833.0	0.33	0.05	0.82



Forward-Looking Statements

This announcement may contain certain forward-looking statements, guidance, forecasts, estimates, prospects, projections or statements in relation to future matters that may involve risks or uncertainties and may involve significant items of subjective judgement and assumptions of future events that may or may not eventuate (**Forward-Looking Statements**). Forward-Looking Statements can generally be identified by the use of forward-looking words such as "anticipate", "estimates", "will", "should", "could", "may", "expects", "plans", "forecast", "target" or similar expressions and may include, without limitation, statements regarding plans, strategies and objectives of management, anticipated production and expected costs. Indications of, and guidance on future earnings, cash flows, costs, financial position and performance are also Forward-Looking Statements.

Persons reading this announcement are cautioned that such statements are only predictions, and that actual future results or performance may be materially different. Forward-Looking Statements, opinions and estimates included in this announcement are based on assumptions and contingencies which are subject to change, without notice, as are statements about market and industry trends, which are based on interpretation of current market conditions. Forward-Looking Statements are provided as a general guide only and should not be relied on as a guarantee of future performance.

No representation or warranty, express or implied, is made by Solstice that any Forward-Looking Statement will be achieved or proved to be correct. Further, Solstice disclaims any intent or obligation to update or revise any Forward-Looking Statement whether as a result of new information, estimates or options, future events or results or otherwise, unless required to do so by law.

Compliance Statement - New Results

The information in this release that relates to new Exploration Results is based on and fairly represents information and supporting documentation prepared by Mr Nick Castleden, a competent person who is a Member of the Australian Institute of Geoscientists. Mr Castleden is an employee of Solstice Minerals Limited. Mr Castleden has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Castleden consents to the inclusion in this release of the new Exploration Results in the form and context in which they appear.

Compliance Statement - Previously Reported Results

The information in this announcement that relates to previously reported Exploration Results and Estimates of Mineral Resources is extracted from the ASX announcements as noted in the 'References' and referenced in the text (**Original Announcements**). The Company confirms that it is not aware of any new information or data that materially affects the relevant information included in the Original Announcements and, in the case of Estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the Original Announcements continue to apply and have not materially changed. Solstice confirms that the form and context in which the Competent Persons' findings are presented have not been materially modified from the Original Announcement.



Appendix 1: Nanadie RC and Diamond Drilling – Table 1 (JORC Code, 2012)

Section 1 Sampling Techniques and Data

(Criteria in the section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	For reverse circulation (RC) drilling, every 1m sample was cone split into clean pre-numbered calico bags from the rig-mounted cyclone/splitter and remaining sample ground-dumped mostly in rows of 30. Each 5m composite sample was collected from the relevant individual 1m sample piles with a spear and placed into a clean hand-written calico sample bag. For composite samples, proportional amounts of material were collected from each sample pile to create the composite. All sampling was undertaken by Solstice staff. Core sampling comprises half core over intervals between 0.3m to 1.2m. Where field duplicates are sampled, the sample comprises quarter core. All sampling was undertaken by Solstice staff.
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	A QAQC sample is inserted at a rate of 1 in 25 primary samples (Certified Reference Material or Blank QAQC sample), also field Duplicates were inserted at a rate of 1 in 25 Primary samples. Appropriate certified reference materials (CRM) were supplied by OREAS Pty Ltd and Blank material was commercially purchased clean builder's sand. Analysis of QAQC samples inserted by the Company is undertaken to monitor sample representivity and independent laboratory conditions. The CRMs used by the Company are grade and matrix matched as close as possible to interpreted geology. The laboratory (Intertek) also performed its own internal checks including insertion of pulp duplicate, standard, and repeat samples as required. Duplicate samples for RC drilling were collected at the drill site and inserted into the sample stream at a frequency of 1 in 25 Primary samples. The Duplicates were sampled directly at the drill rig along with the Primary samples, with the Duplicate samples split via cone splitter. Core sampling is from one side of the core based on an orientation line marked on the core. Duplicates were collected as quarter core based on the same methods as that for the Primary sample. Diamond drill core is aligned and measured by tape at the field core yard and data is compared to drill contractor core block data consistent with normal industry practice.
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information</i>	For RC drilling 1m samples were collected in a clean pre-numbered calico bag via a rig-mounted cyclone/splitter with the bulk sample collected into a plastic bucket and laid out on a cleared area of ground in rows of 30 samples. Each 1m split sample is approximately 2-3kg and representative of the metre drilled. All samples are weighed as-received by the laboratory. Each 5m composite sample is collected from each 1m sample pile over the relevant interval using a spear and proportional amounts placed into a hand-written calico sample bag to make up an approximate 2-3kg sample. Core sampling comprises half core over intervals between 0.3m to 1.2m in length. Where field Duplicates are sampled, the sample comprises quarter core. Core samples are collected in new, clean green 200µm sample bags, double bagged and sealed with zip-ties. Bags are labelled and sample book tags are inserted into the bags.
Drilling techniques	<i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube,</i>	The RC drilling was undertaken by an independent contractor, Core Drilling, using a custom-built truck mounted drill rig. The drill string comprised 6m rods with a standard 5.5inch face sampling RC bit. Each hole was drilled to or near its planned depth. Each drillhole was supervised by a Solstice geologist.



Criteria	JORC Code explanation	Commentary
	<i>depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	Diamond drilling was undertaken by independent contractor, Topdrill, drilling NQ-sized core to EOH from the base of each RC pre-collar. Drill core was routinely oriented at the end of every run using an OmniX42 instrument. The end-of-hole depth of the NANRCD004 tail was 629.1m.
Drill sample recovery	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	The RC sample recoveries for each metre were visually assessed by the geologist on site and estimated to be within industry acceptable standards. Moisture content (wet, dry, moist) was recorded in drill logs. Core sample recovery is determined by measuring the quantity of recovered core (after reorientation of core) against the recorded depth. Recovery or loss is recorded in the database.
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	Ground water was encountered in every hole, but samples are predominantly dry. The RC drill rig utilised an onboard 350psi compressor and 1150cfm air pack, and a separate auxiliary 350psi/1150cfm booster air pack and compressor which typically provided dry and representative samples with good recovery. Core representivity was ensured by reconstructing and orienting core prior to marking a "cut line". Sampling was consistently taken from one half of the core based on the "cut line".
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	No relationship appears to exist between recovery and grade, and no bias is noted between assay grades and sample mass with either RC or diamond samples. Sample mass received by the lab is recorded and reported to Solstice for both RC and diamond samples.
Logging	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	Geological logging for both RC and diamond samples was undertaken by a Solstice geologist during drilling and is considered appropriately detailed for this phase of exploration. Geological data for both RC and diamond drill samples is logged according to the Solstice Geology Legend which conforms to industry best practice. This includes logging regolith, lithology, alteration, mineralisation, veining and structural features. Where required the logging recorded the abundance of particular minerals or the intensity of alteration using defined ranges. Geological logging is governed by Solstice's internal geological protocols and procedures document to ensure consistency between loggers. Rock quality designation (RQD) plus alpha and beta angles of structures were collected for diamond drill core.
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	Logging of RC and diamond core samples is primarily qualitative in nature and is closely governed by Solstice standard geological protocols and procedures. Transported cover and regolith types were also defined in RC drill sample logging. The logging is considered appropriate for this phase of exploration. All drill core is photographed dry and wet before cutting and sampling is undertaken for future analysis. Core photos are labelled and archived on Solstice computer servers.
	<i>The total length and percentage of the relevant intersections logged.</i>	The RC drillhole samples are logged 100% from surface to the end of hole (EOH) in detail with chip samples collected for every metre in chip trays for archive and future reference. Geological events such as bottom of transported cover, base of complete oxidation, water table, and top of fresh rock are also recorded. The logging is considered appropriate to this phase of exploration. Diamond core is logged in full and visual sulphide percentage estimates are recorded in logs. Log intervals range from 0.3-1.2m in length.
Sub-sampling techniques and sample preparation	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	Sampling comprises half core over intervals between 0.3 to 1.2m. Where field duplicates are sampled, the sample comprises quarter core. Half core was retained in the core trays for future reference. The mass of each core sample is typically <5kg. The same portion of core is consistently sampled based on the location of the orientation line.



Criteria	JORC Code explanation	Commentary
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	The composite RC drill samples were spear sampled from piles laid out on the ground at the drill site. The majority of samples were collected dry, with very few collected wet or moist. One metre resamples are from samples collected directly from the rig-mounted cyclone/splitter and laid out with the relevant ground dumped sample. The one metre samples are collected in pre-numbered clean calico bags.
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	For RC drilling, one metre resamples are from samples collected directly from the rig-mounted cyclone/splitter and laid out with the relevant ground dumped sample. The samples were sent to independent laboratory, Intertek, where samples were oven dried at 100C, crushed and pulverised to 85% of total sample passing 75µm, using the SP03 or SP05 methods. The nature and quality of the sample preparation are considered appropriate. The 5m composite RC samples were collected from unmineralised granite where identified by the geologist. Each sample was collected with a spear. These are standard industry practices for this phase of exploration. For diamond drilling, core samples are considered to have very high sample integrity and use of half core and quarter core samples is appropriate. The diamond core sample preparation undertaken by Intertek follows industry best practice for accredited facilities and is considered appropriate for the sample matrix type and analysis method. All laboratory preparation was undertaken in Perth. Diamond core samples are dried and crushed to -3.35mm with coarse reject stored in a refrigerated room for future use. The -3.35mm sub-sample is pulverised to 85% of total sample passing 75µm.
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	On site, field Duplicate samples are taken at a rate of 1 in 25 Primary samples based on the Company's QAQC procedures, which requires either a CRM, Blank or Duplicate be inserted in the sample stream at least every 25th Primary sample. The CRMs used by the Company are sourced from Geostats Pty Ltd and Oreas™ and are of copper and gold grade and matrix that matched as close as possible to the interpreted geology. At the laboratory stage, internal QAQC pulp duplicates are taken at a rate of 1 in 28 by Intertek. Appropriate CRM material and Control Blanks are also inserted and assessed by Intertek for internal laboratory QAQC. The QAQC Intertek inserted sample data are evaluated by Solstice's independent database manager, Core Geoscience Pty Ltd.
	<i>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</i>	Field Duplicate samples were collected during RC drilling and inserted into the sample batches to check and ensure representivity of sample methods. Pulp repeats and element repeats for all sample types are undertaken by Intertek at the laboratory. The QAQC field inserted sample data are evaluated by Solstice's independent database manager, Core Geoscience Pty Ltd.
	<i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i>	Sample mass for RC drilling of nominally 1.5–3kg for each sample is considered appropriate for the rock type and style of mineralisation. The NQ half core sample sizes are appropriate for the rock type and style of mineralisation.
<i>Quality of assay data and laboratory tests</i>	<i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i>	Laboratory assaying for all sample types is undertaken by Intertek, an ISO 9001 certified laboratory. All sample types assayed for gold are subjected to the lead collection Fire Assay technique which uses a 50g charge with an ICP-MS finish and is considered to provide near total gold recovery. For all other elements, including copper and silver, the samples are subjected to a Four Acid digest with an ICP/MS or ICP/OES finish and is considered to provide near total digest. Total sulphur content is measured by the Intertek method CSA02. Sulphide sulphur is measured by Intertek method S71/OE. The nature and quality of the procedures and assaying techniques at the laboratory are considered appropriate for the rock type and style of mineralisation. Intertek holds various International Standards Organisation (ISO) certifications, and the laboratory procedures are considered standard industry practice.



Criteria	JORC Code explanation	Commentary
	<i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i>	No geophysical tools were used in the field in determining any element analysis.
	<i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i>	During RC drilling, field Duplicates are taken on site for samples using the same method as the Primary sample (i.e. spear/cyclone) from piles laid out on the ground or from the cyclone directly as appropriate. Field Duplicates for diamond core samples were taken on site as quarter core samples cut from the half core designated as a Primary sample. Analysis of QAQC and Duplicate samples inserted by the Company is undertaken to monitor sample representivity and independent laboratory conditions. The analysis is undertaken by Solstice's independent database manager, Core Geoscience Pty Ltd, and checked by the Solstice geologists. Acceptable levels of accuracy and precision have been established. At the laboratory Intertek also performed internal checks including insertion of pulp duplicates, CRMs, control blanks and repeats as required. Internal screen checks are also performed to ensure the mass percent passing 75µm is consistently high. The Competent Person is satisfied acceptable levels of accuracy and precision have been established.
Verification of sampling and assaying	<i>The verification of significant intersections by either independent or alternative company personnel.</i>	Significant sulphides intersections in core being reported have been checked by experienced, senior Solstice geologists.
	<i>The use of twinned holes.</i>	No twinning of holes was undertaken.
	<i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i>	The primary lithological data for RC and diamond drilling is collected by a Company geologist in the field recording it directly into a database logging sheet on a Toughbook laptop. Data is entered into pre-defined MS Excel based log sheets following the Company's documented internal geological protocols and procedures manual. Validation measures for the field data are built into the MS Excel based log sheets. Sample logs are recorded on paper sheets in the field. Sample data is entered into the database from the sample sheets and provided to the database manager for alignment of assay data. Field data is backed-up each day with logs stored in the Company database hosted on a server. Field data is first verified by senior Company geologists and then sent electronically to Solstice's independent data management company, Core Geoscience Pty Ltd, for incorporation into a Master Database. Core Geoscience conducts several phases of field log data validation to ensure consistency and completeness. The subsequent validated and compiled dataset is exported into appropriate formats (MS Access and Micromine™) for use by Company geologists. Laboratory data is provided electronically to the Company and Core Geoscience Pty Ltd and is validated and imported by Core Geoscience into the Master Database. Data is supplied by Intertek as ASCII text file spreadsheets and PDF certificates signed by the relevant laboratory manager.
	<i>Discuss any adjustment to assay data.</i>	No adjustments have been made to any laboratory assay results.
Location of data points	<i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i>	The initial location of RC and diamond drill collars is recorded using a handheld Garmin GPS-Map unit with an accuracy of +/-3m, using MGA94 Zone 50 South. This method is considered appropriate for this phase of exploration drilling. Downhole surveys were conducted by trained drilling contractor personnel immediately after the completion of every RC hole using a REFLEX, North Seeking survey tool referenced to True North. For the diamond holes an OmniX 42 North seeking gyro tool was used. No Mineral Resource Estimate work has been undertaken.



Criteria	JORC Code explanation	Commentary
	<i>Specification of the grid system used.</i>	All drill hole data is recorded in GDA94, zone 50.
	<i>Quality and adequacy of topographic control.</i>	Past explorer Cyprium Metals commissioned a topographic survey in February 2021, completed by Arvista Surveys. A Digital Terrain Model (DTM) was constructed using the data from the aerial survey as well as from existing drillhole surveys and adjusted where low accuracy hand-held GPS pickups created obvious anomalies in the low relief areas of the project.
<i>Data spacing and distribution</i>	<i>Data spacing for reporting of Exploration Results.</i>	Drillhole spacing nominally at 80x80m and 40x40m is considered by the Competent Person to be appropriate for the magmatic layered intrusive copper mineralisation being targeted at Nanadie.
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	Past explorer Intermin considered the data spacing 40 to 50m x 20 to 30m to be sufficient to define mineralisation to a 2004 JORC Code Compliant Inferred Resource confidence level in 2013. Cyprium completed infill and extensional drilling to close the drill spacing to a nominal 25m x 25m pattern. This new closer spacing is considered to be more than sufficient to define a 2012 JORC Inferred Mineral Resource Estimate for Nanadie. No updates are being made to the Mineral Resource Estimate at this time.
	<i>Whether sample compositing has been applied.</i>	Where required for RC drilling, a 5m composite sample was collected from each 1m sample pile over the relevant interval using a spear and proportional amounts placed into a hand-written calico sample bag. No compositing is carried out on core samples.
	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	Initial RAB drilling by Newcrest (1996), Dominion (1999) and Intermin (2003) was drilled on 060-240° bearing drill lines but the bulk of the subsequent drilling was drilled on east-west drill lines. The drill angle is considered adequate to test the Nanadie Well mineralisation. A number of scissor holes have also been drilled. The strike of the Nanadie Well mineralisation is north to north-northwest and the Cyprium 2020-2021 drilling pattern was designed to achieve unbiased sampling along the strike of the deposit. The horizontal to low angle nature of the oxide/supergene mineralisation was not biased by the use of vertical RC drillholes. The first two holes from the 2020-2021 diamond drill program were drilled at -60 and -80° dip angles to the west with the third hole drilled at -65° to the east and the fourth hole -63° to the east and the fifth hole drilled at -60° to the east. The regional schists and gneisses dip steeply (75°) to the east-northeast but the foliation within the layered intrusives is steep (60-80) to the west-southwest. Further, secondary sulphide veinlets are observed in drill core dipping at 50 to 60° to the northeast. Further, structural analysis is required to determine a more optimum drill angle. The Competent Person is satisfied the orientation of sampling achieved unbiased sampling of structures.
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	The current understanding of the Nanadie Well Cu-Au Deposit suggests that current drill orientation has not introduced any preferential sampling bias. The primary disseminated mineralisation appears to have been remobilised into the regional fabric and now dips to the west-southwest. Cross-cutting hydraulically brecciated potentially silver-rich fault structures dip to the north-northeast. Further work is required to determine the optimum drill angle, and it is likely that several drill directions may be required to adequately test all the potential mineralised structural orientations at the Nanadie Well Project.
<i>Sample security</i>	<i>The measures taken to ensure sample security.</i>	Chain of sample custody is maintained by Solstice personnel. Samples were collected into 200µm plastic or calico bags which were then secured in numbered polyweave bags at the drill site. These polyweave bags were inserted into Bulka bags and then transported by Solstice staff directly to the Toll IPEC yard in Meekatharra for subsequent transportation to Intertek in Perth. These facilities have lockable yards to maintain security prior to sample processing. Sample submission documents listing the batch number, sample number and order number accompany the samples at each stage and are emailed directly to the laboratory managers. Samples



Criteria	JORC Code explanation	Commentary
		are checked by Intertek to confirm receipt of all samples. If a discrepancy is noted, this is reported by the laboratory to Solstice.
<i>Audits or reviews</i>	<i>The results of any audits or reviews of sampling techniques and data.</i>	Internal reviews by experienced senior geologists of sampling techniques and data confirm that sampling has been conducted to industry standards.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	Licences E51/1040 and M51/887 are held by Solstice as 100% owner. In addition to statutory State Government Royalties, additional royalties are payable to an original vendor syndicate: • 0.735% of the revenue received from the sale of copper metal or copper in concentrate from the tenement, • 0.49% of the revenue received from the sale of any other metal, mineral or ore from the tenement.
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	The licences are in good standing and there are no known impediments to renewal of the licence or to obtaining any licence to operate.
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	The area has seen extensive historical drilling, including a total of 184 historical RAB RC and/or diamond drillholes in the vicinity of the Nanadie MRE. In summary: Between 1976-1977 BHP Ltd. completed surface mapping, rock chip and soil sampling, 72 shallow 0.5 to 38m deep RAB drillholes targeting Cu, Ni & Zn and geophysical surveys. Between 1987-1993 Dominion Mining Ltd completed a total of 126 shallow RAB holes were drilled to the base of the cover and 9 shallow RC holes adjacent to historic workings to the north and south of the current MRE area. Between 1995-1996 Newcrest Mining Ltd. completed a total of 63 vertical RAB holes on 1km spaced lines with holes 300m apart on each drill line. A single fence of holes from this programme was drilled across the current Nanadie Inferred Resource that included the 23m deep discovery hole ER317-13 with 14m @ 1.2% Cu from 9m down hole. In 1999 Dominion Mining Ltd. drilled 3 fences of RAB holes across the known Nanadie deposit with holes 100m apart on section for a total of 14 drillholes. Their best results were 1m @ 0.7% Cu from holes 99NWAR009 from 8m and 99NWAR011 from 23m. In 2003, Intermin drilled 14 RAB holes that followed up the previously reported Newcrest and Dominion drill intercepts in 2004-2013 Intermin. drilled 95 RC holes 63 of which directly targeted the current Nanadie Well Inferred Resource area, the other 32 holes targeted areas outside the known MRE. During this period, they drilled 89 RAB holes of which 75 were outside the MRE area. In 2004, Intermin engaged Southern Geoscience to complete an Induced Polarisation survey at Nanadie Well. Seven lines were read on 200m section spacings north from 6994800mN. In 2006, Intermin engaged DF-EX Exploration Kalgoorlie to complete a ground magnetic survey using a GSM-19 Overhauser v7.0 total field magnetometer. In 2008, Intermin engaged GPX airborne to fly an airborne helicopter EM survey over the Nanadie Well E51/1040 for 99-line km survey using a bird mounted Geometrics G 822A Caesium vapor optically pumped magnetometer continuously sampling at



Criteria	JORC Code explanation	Commentary
		1200Hz, sensitive to 0.001nT. In 2012, Intermin commissioned Newexco to complete down hole EM surveys on 4 drill holes and a surface moving loop EM survey using an EMIT - SMARTem24 geophysical receiver. Results from 63 RC and 25 RAB (14 drilled by Intermin, 11 drilled by Newcrest and Dominion) holes were used by Intermin in the estimation of the 2004 JORC Code Compliant Inferred Resource of 36.07Mt @ 0.42% Cu & 0.064 g/t Au (Intermin, 2013). Mithril Ltd 2013-2019. Ground geophysical surveys. 35 RC drillholes into various targets outside Nanadie Resource area including the discovery of the Stark Prospect. Mithril also drilled 5 diamond drillholes but only one hole was drilled into Nanadie Resource area in 2017. Horizon Minerals Ltd drilled 14 RC holes into the Nanadie Resource area in 2019. Between 2020-2024 Cyprum completed 84 RC holes and 7 DD holes over the Nanadie Project licences which culminated in the definition of a JORC 2012 compliant Inferred Mineral Resource Estimate of 40.4Mt @ 0.4% Cu, 0.1g/t AU and 1.0g/t Ag at a cut-off grade of 0.25% copper.
Geology	<i>Deposit type, geological setting and style of mineralisation.</i>	The project lies within the Yilgarn Craton and is proximal to the eastern flank of the Murchison Domain within the broader Youanmi terrane. The Nanadie Copper-Gold deposit is hosted within the Barrambie Igneous Complex (BIC) which in turn, is part of the broader Meeline suite. The BIC is interpreted to be Mesoarchaen age, circa 2810Ma, and is intruded by Neoarchaen granites and granodiorites (Ivanic et al., 2010). The BIC is a 20km long elongate mafic intrusive sill that parallels a NE-SW trending shear that marks the eastern margin of the Murchison Domain (Ivanic et al., 2010). The igneous suite is described as east facing and dipping at 75° to the east-northeast (Ivanic et al., 2010). The Nanadie Well layered intrusive is within the BIC and composed of upper greenschist facies deformed and metamorphosed gabbro, leucogabbro, anorthosites and pyroxenites. Surrounding rocks at Nanadie consist of amphibolites, sheared chlorite-quartz-muscovite schists and gneisses and granite/granodiorite intrusive bodies that flank both sides of the Nanadie Well layered intrusive as well as forming irregular granitic dykes and pegmatites that crosscut the earlier mafic intrusives. There is a thin cover generally 0.5 to 6m of Quaternary aeolian sands, soil and calcrete. The primary copper mineralisation (chalcopyrite) at Nanadie Well is associated with pyrite, pyrrhotite and rare pentlandite and minor precious metals including gold and lesser platinum and palladium. Sulphides and precious metals have been later remobilised into the regional west-dipping shear foliation, most likely during regional folding and associated regional metamorphism. Flat lying to low angle oxide/supergene Cu/Au mineralisation occurs at the top of the current and paleo water table levels. The oxidised zone is marked mainly by iron-stained joint surfaces and some secondary Cu mineralisation dominantly malachite with lesser azurite.
Drill hole Information	<i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <i>• easting and northing of the drill hole collar</i> <i>• elevation or RL (Reduced Level -</i>	See Figure 1 in body text and References.



Criteria	JORC Code explanation	Commentary
	elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length.	
	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	Not applicable, all information is included. The Competent Person is satisfied that drillhole information has been adequately considered, and material information has been appropriately described.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.	Assay grades are length weighted. The lower cut-off grade for copper assays is 0.2% and 0.1g/t for gold. No upper cut-off grade is applied.
	Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	Aggregate intercepts reported are length-weighted. Intercepts are reported on the basis of minimum 10m interval at 0.4% copper and 5m maximum internal dilution.
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	Metal equivalent values are not currently being reported.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	Significant intercepts are reported as downhole lengths only.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being	Figures in the main body of this release illustrate the Nanadie deposit mineralisation in both sectional, plan and isometric views and also indicate the variable drillhole angles and azimuths.



Criteria	JORC Code explanation	Commentary
	<i>reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	
<i>Balanced reporting</i>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	All currently known significant drill assay data has been reported.
<i>Other substantive exploration data</i>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	Other geological and geophysical work relating to Nanadie Well Project has been reported by previous operators. See ASX releases from Intermin Resources Limited (IRC), Mithril Ltd (MTH) and Horizon Minerals (HRZ). Other historical data can be located on the DEMIRS WAMEX report system. Cyprium completed an airborne magnetic and radiometric survey over the Nanadie Well E51/1040 licence in 2020. Thompson Aviation used a Cessna 210 aircraft flying at a 50m flight height to complete 3176km, 50m east-west line spaced survey. The survey used a Geometrics G822A magnetometer and a Radiation Solutions RSS00 Gamma Ray spectrometer. Downhole EM surveys were conducted on the 2020/21 diamond drill holes at Nanadie Well and Stark in February-March 2021. The EM survey was conducted with continuous sensing tool for electromagnetic conductance anomalies with an Atlantis slim line tri-axial fluxgate magnetometer. All geophysical methods utilised have been standard practice for the generation and acquisition of geophysical data in the resources industry. Other modifying factors such as the metallurgical characteristics, potential environmental factors, hydrological conditions and geotechnical factors have not been investigated at the Nanadie Project at this point in time. These would be considered as part of future resource updates.
<i>Further work</i>	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	Further infill and extension RC drilling programmes are planned. The broader Nanadie geological model will be used to identify mineralisation trends and identify areas along strike and down dip that can be targeted for drilling. Further diamond drilling is planned to test for high-grade zones below RC operating depths, aid structural interpretations and to allow more detailed mineralisation domain demarcation. This drill core will also provide additional core for bulk density characterisation. Metallurgical testing is at an advanced planning phase and will utilise the core samples from current core holes. Further studies may be required depending on the outcomes of the initial sighter metallurgical test work.